
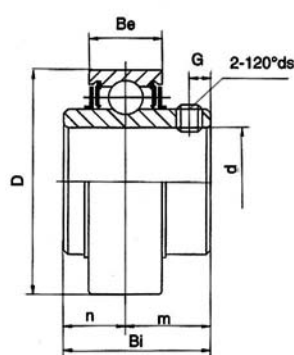


RODAMIENTOS / BEARINGS / ROULEMENTS / KUGELLAGER



UC200 - UR200




Rodamiento Bearing Unit Roulement Kugellager No.	Diámetro del eje Shaft Diameter Diamètre du axe Achsendurchmesser		Dimensiones Dimensions Dimensions Dimension								Radio de carga dinámica Basic dynamic load rating Rayon de charge dynamique Dynamische Kraft	Radio de carga estática Basic static load rating Rayon de charge statique Estatistische Kraft	Peso Weight Poids Gewicht (kg)
	in	mm	D	Bi	Be	n	m	G	ds				
									mm	in			
UC 201 (UR) 201-8	1/2	12	40	27,4	14	11,5	15,9	4,5	M5X0,8	10-32	7,36	4,79	0,15
UC 202 (UR) 202-10	5/8	15	40	27,4	14	11,5	15,9	4,5	M5X0,8	10-32	7,36	4,79	0,14
UC 203 (UR) 203-11	11/16	17	40	27,4	14	11,5	15,9	4,5	M5X0,8	10-32	7,36	4,79	0,13
UC 204-12 (UR) 204	3/4	20	47	31,0	17	12,3	18,7	5,0	M6X1,0	1/4-28	9,88	6,65	0,18
UC 205-14 (UR) 205-15	7/8		52	34,1	17	14,3	19,8	5,0	M6X1,0	1/4-28	10,78	9,93	0,22
205 205-16	15/16		25	1									0,20
UC 206-18 (UR) 206	1-1/8	30	62	38,1	19	15,9	22,2	5,0	M8X1,0	1/4-28	17,97	11,31	0,19
206-19 206-20	1-3/16		62	38,1	19	15,9	22,2	5,0	M8X1,0	1/4-28	17,97	11,31	0,19
206-20	1-1/4												0,34
UC 207-20 (UR) 207-21	1-1/4	35	72	42,9	20	17,5	25,4	7,0	M8X1,0	5/16-24	19,75	15,30	0,32
207-22	1-5/16												0,31
207	1-3/8												0,30
207-23	1-7/16												0,52
UC 208-24 (UR) 208-25	1-1/2	40	80	49,2	21	19,0	30,2	8,0	M8X1,0	5/16-24	25,09	19,84	0,50
208	1-9/16												0,48
UC 209-26 (UR) 209-27	1-5/8		85	49,2	22	19,0	30,2	8,0	M8X1,0	5/16-24	25,14	20,46	0,46
209-28	1-11/16	45											0,68
209	1-3/4												0,64
UC 210-30 (UR) 210-31	1-7/8		90	51,6	22	19,0	32,6	10,0	M10X1,25	3/8-24	26,98	23,18	0,63
210	1-15/16	50											0,78
UC 211-32 (UR) 211-34	2		100	55,6	25	22,2	33,4	10,0	M10X1,25	3/8-24	33,37	29,22	0,85
211	2-1/8												0,80
211-35	2-3/16	55											0,78
UC 212-36 (UR) 212	2-1/4		110	65,1	27	25,4	39,7	10,0	M10X1,25	3/8-24	36,74	32,93	1,22
212-38	2-3/8												1,10
212-39	2-7/16	60											1,07
UC 213-39 (UR) 213-40	2-7/16		120	65,1	29	25,4	39,7	10,0	M10X1,25	3/8-24	44,01	40,00	1,05
213	2-1/2												1,65
UC 214-43 (UR) 214-44	2-11/16	65	125	74,6	30	30,2	44,4	12,0	M12X1,5	7/16-20	46,79	45,03	1,51
214	2-3/4												1,47
UC 215-47 (UR) 215	2-15/16		130	77,8	30	33,3	44,5	12,0	M12X1,5	7/16-20	50,85	49,30	1,42
215-48	3	75											1,96
UC 216 (UR) 217-52			140	82,6	33	33,3	49,3	12,0	M12X1,5	7/16-20	55,04	53,31	1,94
217	3-1/4												1,86
UC 218-56 (UR) 218	3-1/2	90	160	96,0	37	39,7	56,3	12,0	M12X1,5	1/2-20	73,83	70,76	2,06
													2,05
													2,04
													2,30
													2,21
													2,13
													2,79
													3,59
													3,38
													4,56
													4,46

RODAMIENTOS / BEARINGS / ROULEMENTS / KUGELLAGER

UCX200

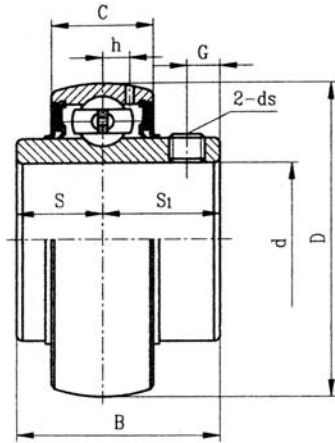

Juntas duales / Dual seals
Joints jumelés / Doppeldichtringe




Junta de labio triple (sufijo R3)
Triple-lip seal (-suffix R3)
Joint à triple lèvre (suffixe R3)
Dreifache Lippendichtung (Suffix R3)

UCX
Tipo tornillo de fijación / Set-screw type
Type vis de fixation / Typ Befestigungsschraube

Rodamiento Bearing Unit Roulement Kugellager No.	Diámetro del eje Shaft Diameter Diamètre du axe Achsendurchmesser		Dimensiones Dimensions Dimensions Dimension								Índice de carga básico Basic load rating Indice de charge de base Grundlastzahl		Peso Weight Poids Gewicht (kg)
	in	mm	d	b	c	s	s1	g	h	ds	Dinámico / Dynamic Dynamique / Dynamisch Cr	Estático / Static Statique / Statisch Cor	
UCX 205-14	7/8	25	62	38,1	19	15,9	22,2	6	5	M6X1	19500	11200	0,42
205-15	15/16		2,4409	1,5000	0,7480	0,6260	0,8740	0,2362	0,1969	1/4-28UNF			0,40
205													0,39
205-16	1												0,38
UCX 206-18	1-1/8	30	72	42,9	20	17,5	25,4	6,5	5,8	M8X1	25700	15200	0,58
206			2,8346	1,6890	0,7874	0,6890	1,0000	0,2559	0,2283	5/16-24UNF			0,58
206-19	1-3/16												0,58
206-20	1-1/4												0,55
UCX 207-22	1-3/8	35	80	49,2	21	19	30,2	8	6,3	M8X1	29600	18200	0,75
207			3,1496	1,9370	0,8268	0,7480	1,1890	0,3150	0,2480	5/16-24UNF			0,75
207-23	1-7/16												0,72
UCX 208-24	1-1/12	40	85	49,2	22	19	30,2	8	6,8	M8X1	31850	20800	0,87
208-25	1-9/16		3,3465	1,9370	0,8661	0,7480	1,1890	0,3150	0,2677	5/16-24UNF			0,87
208													0,83
UCX 209-26	1-5/8	45	90	51,6	23	19	32,6	9	6,5	M10X1,25	35100	23200	1,10
209-27	1-11/16		3,5433	2,0315	0,9055	0,7480	1,2835	0,3543	0,2559	3/8-24UNF			1,01
209-28	1-3/4												0,97
209													0,95
UCX 210-30	1-7/8	50	100	55,6	25	22,2	33,4	9	7,2	M10X1,25	43550	29200	1,43
210-31	1-15/16		3,9370	2,1890	0,9843	0,8740	1,3150	0,3543	0,2835	3/8-24UNF			1,32
210													1,29
210-32	2												1,26
UCX 211-34	2-1/8	55	110	65,1	27	25,4	39,7	10,5	8,2	M10X1,25	47800	32800	1,95
211			4,3307	2,5630	1,0630	1,0000	1,5630	0,4134	0,3228	3/8-24UNF			1,80
211-35	2-3/16												1,78
211-36	2-1/4												1,70
UCX 212		60	120	65,1	28	25,4	39,7	12	8	M10X1,25	57200	40000	2,05
212-38	2-3/8		4,7244	2,5630	1,1024	1,0000	1,5630	0,4724	0,3150	7/16-20UNF			2,03
212-39	2-7/16												1,95
UCX 213-40	2-1/2	65	125	74,6	30	30,2	44,4	12	9	M12X1,25	60800	45000	2,61
213			4,9213	2,9370	1,1811	1,1890	1,7480	0,4724	0,3543	7/16-20UNF			2,52
UCX 214-44	2-3/4	70	130	77,8	30	33,3	44,5	12	9	M12X1,25	66000	49500	2,75
214			5,1181	3,0630	1,1811	1,3110	1,7520	0,4724	0,3543	7/16-20UNF			2,74
UCX 215		75	140	82,6	33	33,3	49,3	14	10,3	M12X1,25	71500	54200	3,41
215-48	3		5,5118	3,2520	1,2992	1,3110	1,9410	0,5512	0,4055	7/16-20UNF			3,32
UCX 216		80	150	85,7	35	34,1	51,6	14	11	M12X1,25	83200	63800	3,87
			5,9055	3,3740	1,3780	1,3425	2,0315	0,5512	0,4331	7/16-20UNF			

RODAMIENTOS / BEARINGS / ROULEMENTS / KUGELLAGER


UC300

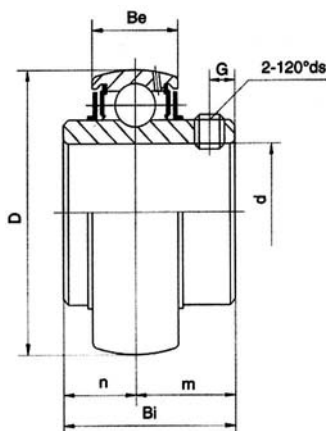

Rodamiento Bearing Unit Roulement Kugellager No.	Diámetro del eje Shaft diameter Diamètre du axe Achsendurchmesser d		Dimensiones Dimensions Dimensions Dimension								Radio de carga dinámica Basic dynamic load rating Rayon de charge dynamique Dynamische Kraft (KN)	Radio de carga estática Basic static load rating Rayon de charge statique Estatische Kraft (KN)	Peso Weight Poids Gewicht (kg)
	in	mm	D	Bi	Be	n	m	G	ds				
									mm	in			
UC 305-14	7/8	25	62	38	20	15	23	6	M6X1.0	1/4-28	17,3	11,51	0,38
305-15	15/16												0,36
305													0,35
305-16	1												0,34
UC 306-18	1-1/8	30	72	43	23	17	26	6	M6X1.0	1/4-28	21,73	15,82	0,58
306													0,56
306-19	1-3/16												0,56
UC 307-20	1-1/4	35	80	48	25	19	29	6	M8X1.0	5/16-24	25,75	18,33	0,77
307-21	1-5/16												0,74
307-22	1-3/8												0,71
307													0,71
UC 308-24	1-1/2	40	90	52	27	19	33	10	M10X1.25	3/8-24	31,35	24,01	1,00
308-25	1-9/16												0,98
308													0,96
UC 309-26	1-5/8	45	100	57	29	22	35	10	M10X1.25	3/8-24	40,66	31,83	1,36
309-27	1-11/16												1,33
309-28	1-3/4												1,30
309													1,28
UC 310-30	1-7/8	50	110	61	32	22	39	12	M12X1.5	7/16-20	47,58	37,94	1,74
310-31	1-15/16												1,68
310													1,65
UC 311-32	2	55	120	66	34	25	41	12	M12X1.5	7/16-20	55,05	44,76	2,08
311-34	2-1/8												1,9
311													1,9
311-35	2-3/16												1,87
UC 312-36	2-1/4	60	130	71	36	26	45	12	M12X1.5	1/2-20	62,88	51,85	2,65
312													2,6
312-39	2-7/16												2,5
UC 313-39	2-7/16	65	140	75	38	30	45	12	M12X1.5	1/2-20	71,34	59,67	3,3
313-40	2-1/2												3,25
313													3,2
UC 314-44	2-3/4	70	150	78	40	33	45	12	M12X1.5	1/2-20	80,10	68,04	3,96
314													3,95
UC 315		75	160	82	42	32	50	14	M14 X1.5	9/16-18	87,12	71,34	3,33
315-48	3												3,24

RODAMIENTOS / BEARINGS / ROULEMENTS / KUGELLAGER

SB200 - CSB200 - UD200

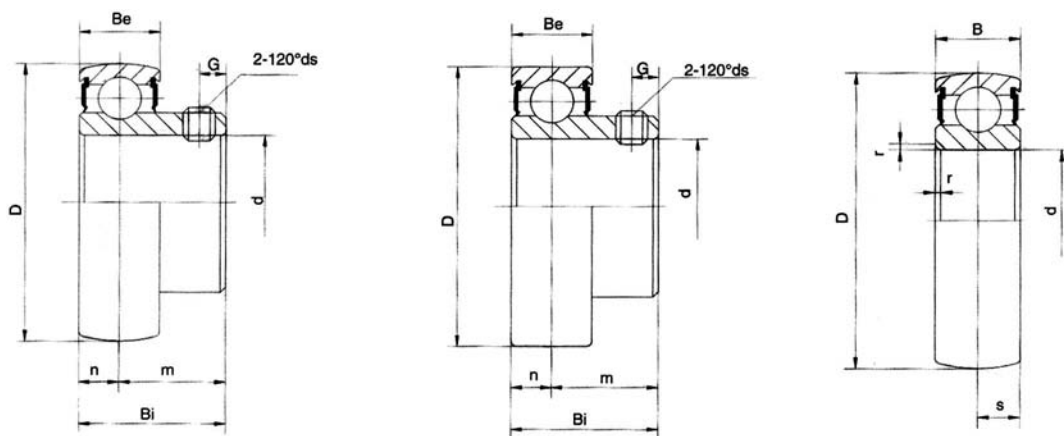


Rodamiento Bearing Unit Roulement Kugellager No.	Diámetro del eje Shaft diameter Diamètre du axe Achsendurchmesser		Dimensiones Dimensions Dimensions Dimension								Radio de carga dinámica Basic dynamic load rating Rayon de charge dynamique Dynamische Kraft (KN)	Radio de carga estática Basic static load rating Rayon de charge statique Estatistische Kraft (KN)	Peso Weight Poids Gewicht (kg)
	in	mm	D	Bi	Be	n	m	G	ds				
									mm	in			
SB 203 (CSB)		17	40	22	12	6,0	16,0	4,5	M5X0,8	10-32	7,36	4,79	0,07
SB 204-12 (CSB) 204	3/4	20	47	25	14	7,0	18,0	5,0	M6X1,0	1/4-28	9,88	6,65	0,13
SB 205-14 (CSB) 205	7/8 15/16	25	52	27	15	7,5	19,5	5,0	M6X1,0	1/4-28	10,78	9,93	0,12
SB 206-16 (CSB) 206	1 1-1/8	30	62	30	16	8,0	22,0	6,0	M6X1,0	1/4-28	14,97	11,31	0,16
206-19 206-20	1-3/16 1-1/4												
SB 207-20 (CSB) 207	1-1/4 1-5/16 207-22	35	72	32	17	8,5	23,5	7,0					M6X1,0
SB 208-24 (CSB) 208	1-1/2 1-9/16	40	80	34	18	9,0	25,0	8,0	M8X1,0	5/16-24	25,09	19,84	0,24
													0,43
													0,40
													0,38
													0,38
													0,37
													0,60
													0,58
													0,58

Rodamiento Bearing Unit Roulement Kugellager No.	Dimensiones Dimensions Dimensions Dimension					Radio de carga dinámica Basic dynamic load rating Rayon de charge dynamique Dynamische Kraft	Radio de carga estática Basic static load rating Rayon de charge statique Elastische Kraft	Peso Weight Poids Gewicht (kg)
	d	D	B	s	r			
UD 203	17	40	12	6,0	1,0	7,36	4,79	0,06
UD 204	20	47	14	7,0	1,5	9,88	6,65	0,10
UD 205	25	52	15	7,5	1,5	10,78	9,93	0,12
UD 206	30	62	16	8,0	1,5	14,97	11,31	0,19
UD 207	35	72	17	8,5	2,0	19,75	15,30	0,27
UD 208	40	80	18	9,0	2,0	25,09	19,84	0,37
UD 209	45	85	19	9,5	2,0	25,14	20,46	0,42
UD 210	50	90	20	10,0	2,0	26,98	23,18	0,47

RODAMIENTOS / BEARINGS / ROULEMENTS / KUGELLAGER


SA200 - CSA200

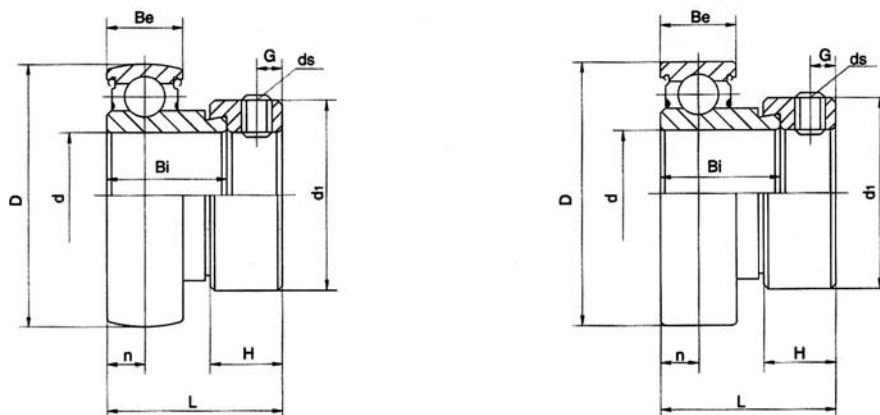

Rodamiento Bearing Unit Roulement Kugellager No.	Diámetro del eje Shaft diameter Diamètre du axe Achsendurchmesser d		Dimensiones Dimensions Dimensions Dimension										Radio de carga dinámica Basic dynamic load rating Rayon de charge dynamique Dynamische Kraft (KN)	Radio de carga estática Basic static load rating Rayon de charge statique Estatistische Kraft (KN)	Peso Weight Poids Gewicht (kg)
	in	mm	D	Be	L	Bi	n	d1	H	G	ds				
											mm	in			
SA 203 (CSA)		17	40	13	28,6	19,1	6,5	28,6	13,5	5,0	M6X1,0	10-32	7,36	4,79	0,12
SA 204-12 (CSA) 204	3/4	20	47	15	31,0	21,5	7,5	33,3	13,5	5,0	M6X1,0	1/4-28	9,88	6,65	0,13
SA 205-14 (CSA) 205-15	7/8	25	52	15	31,0	21,5	7,5	38,1	13,5	5,0	M6X1,0	1/4-28	10,78	9,93	0,18
205	15/16														
205-16	1														
SA 206-18 (CSA) 206	1-1/8	30	62	18	35,7	23,8	9,0	44,5	15,9	6,0	M6X1,0	1/4-28	14,97	11,31	0,33
206-19	1-3/16	35	72	19	38,9	25,4	9,5	55,0	17,5	6,5	M8X1,0	1/4-28	19,75	15,30	0,51
206-20	1-1/4														
SA 207-20 (CSA) 207-21	1-1/4														
207-22	1-5/16	40	80	22	43,7	30,2	11	60,3	18,3	6,5	M8X1,0	5/16-24	25,09	19,84	0,65
207	1-3/8														
207-23	1-7/16														
SA 208-24 (CSA) 208-25	1-1/2	45	85	22	43,7	30,2	11	63,5	18,3	6,5	M8X1,0	5/16-24	25,14	20,46	0,68
208	1-9/16														
SA 209-26 (CSA) 209-27	1-5/8														
209-28	1-11/16	50	90	22	43,7	30,2	11	69,9	18,3	6,5	M8X1,0	5/16-24	26,98	23,18	0,77
209	1-3/4														
SA 210-30 (CSA) 210-31	1-7/8														
210	1-15/16	55	100	24	48,4	32,5	12	76,2	20,7	8,0	M10X1,25	3/8-24	33,37	29,22	0,86
SA 211-32 (CSA) 211-34	2														
211	2-1/8														
211-35	2-3/16														0,81

RODAMIENTOS / BEARINGS / ROULEMENTS / KUGELLAGER


NA200

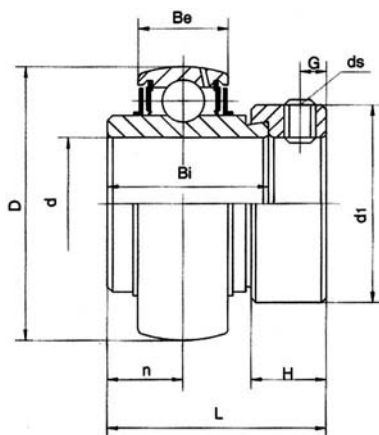

Rodamiento Bearing Unit Roulement Kugellager No.	Diámetro del eje Shaft diameter Diamètre du axe Achsendurchmesser d		Dimensiones Dimensions Dimensions Dimension										Radio de carga dinámica Basic dynamic load rating Rayon de charge dynamique Dynamische Kraft (KN)	Radio de carga estática Basic static load rating Rayon de charge statique Estatistische Kraft (KN)	Peso Weight Poids Gewicht (kg)
	in	mm	D	Be	L	Bi	n	d1	H	G	ds				
											mm	in			
NA 204-12 204	3/4	20	47	17	43,6	34,1	17,1	33,3	13,5	5,0	M6X1,0	1/4-28	9,88	6,65	0,22 0,21
NA 205-14 205-15 205 205-16	7/8 15/16 1	25	52	17	44,4	34,9	17,5	38,1	13,5	5,0	M6X1,0	1/4-28	10,78	9,93	0,28 0,27 0,25 0,25
NA 206-18 206 206-19 206-20	1-1/8 1-3/16 1-1/4	30	62	19	48,4	36,5	18,3	44,5	15,9	6,0	M6X1,0	1/4-28	14,97	11,31	0,41 0,39 0,39 0,36
NA 207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	72	20	51,2	37,7	18,8	55,0	17,5	6,5	M8X1,0	5/16-24	19,75	15,30	0,66 0,63 0,60 0,60 0,57
NA 208-24 208-25 208	1-1/2 1-9/16	40	80	21	56,4	42,9	21,4	60,3	18,3	6,5	M8X1,0	5/16-24	25,09	19,84	0,81 0,77 0,77
NA 209-26 209-27 209-28 209	1-5/8 1-11/16 1-3/4	45	85	22	56,4	49,2	21,4	63,5	18,3	6,5	M8X1,0	5/16-24	25,14	20,46	0,93 0,88 0,84 0,84
NA 210-30 210-31 210	1-7/8 1-15/16	50	90	22	62,7	49,2	24,6	69,9	18,3	6,5	M10X1,25	5/16-24	26,98	23,18	1,03 1,02 1,02
NA 211-32 211-34 211 211-35	2 2-1/8 2-3/16	55	100	25	71,4	55,5	27,8	96,2	20,7	8,0	M10X1,25	3/8-24	33,37	29,22	1,58 1,41 1,37 1,37
NA 212-36 212 212-39	2-1/4 2-7/16	60	110	27	77,8	61,9	31,0	84,1	22,3	8,0	M10X1,25	3/8-24	36,74	32,93	2,04 1,85 1,78

RODAMIENTOS / BEARINGS / ROULEMENTS / KUGELLAGER


SER200

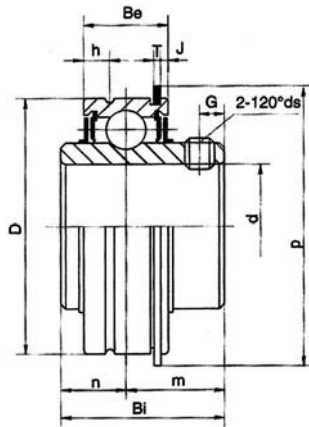

Rodamiento Bearing Unit Roulement Kugellager No.	Diámetro del eje Shaft diameter Diamètre du axe Achsendurchmesser d		Dimensiones Dimensions Dimensions Dimension												Radio de carga dinámica Basic dynamic load rating Rayon de charge dynamique Dynamische Kraft (KN)	Radio de carga estática Basic static load rating Rayon de charge statique Estatische Kraft (KN)	Peso Weight Poids Gewicht (kg)
			D	Bi	Be	n	m	G	T max	p	J	h	ds				
	in	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	in				
SER 204-12 204	3/4	20	47	31,0	15,8	10,3	20,7	5	1,12	52,7	2,4	3,8	M6X1,0	1/4-28	9,88	6,65	0,22 0,20
SER 205-14 205-15 205 205-16	7/8 15/16 1	25	52	34,9	19,0	13,1	21,8	5	1,12	57,9	2,4	5,2	M6X1,0	1/4-28	10,78	9,93	0,68 0,66 0,62
SER 206-18 206 206-19 206-20	1-1/8 1-3/16 1-1/4	30	62	38,1	22,2	15,9	22,2	5	1,70	67,7	3,2	5,6	M6X1,0	1/4-28	14,97	11,31	0,88 0,86 0,84 0,79
SER 207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	72	42,9	23,8	17,5	25,4	7	1,70	78,6	3,2	5,6	M8X1,0	5/16-24	19,75	15,30	0,62 0,59 0,56 0,53 0,53
SER 208-24 208-25 208	1-1/2 1-9/16	40	80	49,2	27,8	19,0	30,2	8	1,70	86,6	3,2	6,4	M8X1,0	5/16-24	25,09	19,84	0,91 0,88 0,86
SER 209-26 209-27 209-28 209	1-5/8 1-11/16 1-3/4	45	85	49,2	27,8	19,0	30,2	8	1,70	96,6	3,2	6,4	M8X1,0	5/16-24	25,14	20,46	1,05 1,00 0,97 0,94
SER 210-30 210-31 210	1-7/8 1-15/16	50	90	51,6	28,5	19,0	32,6	10	2,46	96,5	3,2	7,5	M10X1,25	3/8-24	26,98	23,18	1,10 1,05 1,02
SER 211-32 211-34 211 211-35	2 2-1/8 2-3/16	55	100	55,6	30,1	22,2	33,4	10	2,46	106,5	3,2	7,5	M10X1,25	3/8-24	33,37	29,22	1,36 1,25 1,21 1,19
SER 212-36 212 212-38 212-39	2-1/4 2-7/16	60	110	65,1	31,7	25,4	39,7	10	2,46	116,6	3,2	7,5	M10X1,25	3/8-24	36,74	32,93	1,82 1,78 1,65 1,59

RODAMIENTOS / BEARINGS / ROULEMENTS / KUGELLAGER

UK200+H2300 - UK200

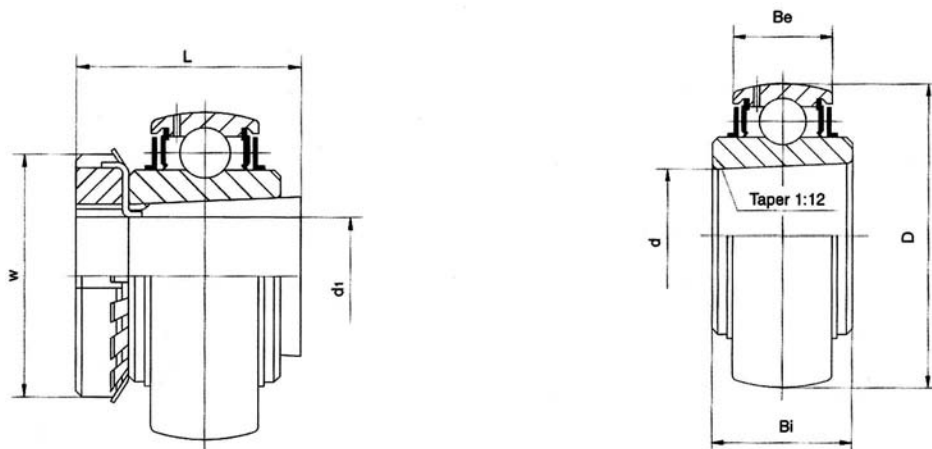


Rodamiento Bearing Unit Roulement Kugellager No.	Diámetro del eje Shaft diameter Diamètre du axe Achsendurchmesser d		Dimensiones Dimensions Dimensions Dimension					Radio de carga dinámica Basic dynamic load rating Rayon de charge dynamique Dynamische Kraft (KN)	Radio de carga estática Basic static load rating Rayon de charge statique Elastische Kraft (KN)	Rodamiento Bearing No. Roulement Kugellager	Manguito Adapter No. Manchon Spannhülsen	Peso Weight Poids Gewicht (kg)
	in	mm	d	D	Be	Bi	L					
UK 205+H2305	3/4	20	25	52	17	23	35	10,78	9,93	UK205	H2305	0,24
205+HE2305											HE2305	0,25
UK 206+H2306	15/16	25	30	62	19	26	38	14,97	11,31	UK206	H2306	0,40
206+HA2306											HA2306	0,41
206+HE2306											HE2306	0,39
UK 207+H2307	1-1/8	30	35	72	20	28	43	19,75	15,30	UK207	H2307	0,55
207+HS2307											HS2307	0,57
207+HA2307											HA2307	0,55
UK 208+H2308	1-1/4	35	40	80	21	29	46	25,09	19,84	UK208	H2308	0,72
208+HE2308											HE2308	0,78
UK 209+H2309	1-7/16	40	45	85	22	30	50	25,14	20,46	UK209	H2309	0,80
209+HA2309											HA2309	0,89
209+HE2309											HE2309	0,84
UK 210+H2310	1-11/16	45	50	90	22	32	55	26,98	23,18	UK210	H2310	0,93
210+HA2310											HA2310	0,98
210+HE2310											HE2310	0,95
UK 211+H2311	1-7/8	50	55	100	25	36	59	33,37	29,22	UK211	H2311	1,91
211+HS2311											HS2311	1,28
211+HE2311											HE2311	1,17
UK 212+H2312	2-1/8	55	60	110	27	38	62	36,74	32,93	UK212	H2312	1,52
212+HS2312											HS2312	1,56
UK 213+H2313	2-3/16	60	65	120	29	40	65	44,01	40,00	UK213	H2313	1,91
213+HA2313											HA2313	2,10
213+HE2313											HE2313	2,04
UK 215+H2315	2-1/2	65	75	130	30	43	73	50,85	49,30	UK215	H2315	2,56
215+HE2315											HE2315	2,65
UK 216+H2316	2-3/4	70	80	140	33	46	78	55,04	53,31	UK216	H2316	3,23
216+HE2316											HE2316	3,24
UK 217+H2317	3	75	85	150	35	48	82	63,98	63,89	UK217	H2317	3,93
217+HE2317											HE2317	3,84
UK 218+H2318	3-1/8	80	90	160	37	50	86	73,83	70,76	UK218	H2318	4,75
218+HS2318											HS2318	4,80

RODAMIENTOS INOXIDABLES / STAINLESS STEEL BEARINGS

ROULEMENTS INOXIDABLES / ROSTFREIE LAGER

SSUC200




Número de la unidad Unit number Numéro de l'unité Stücknummer	Diám. orificio Bore dia. Diam. orifice Öffnungsquerschnitt d		Dimensiones (pulgadas) o (mm) Dimensions (in) or (mm) Dimensions (pouces) ou (mm) Abmessungen (Zoll) oder (mm)							Peso Weight Poids Gewicht (kg)
	Pulgada / Inch Pouce / Zoll	(mm)	D	Bi	Be	n	m	G	Ds	
SSUC201-8 SSUC201	1/2	12								0.20
SSUC202-9 SSUC202-10 SSUC202	9/16 5/8	15	1.8504 47	1.2205 31	0.6693 17	0.5000 12.7	0.7205 18.3	0.1969 5	1/4-28 M6P0.75	0.21
SSUC203-11 SSUC203	11/16	17								0.19
SSUC204-14 SSUC204	3/4	20	1.8504 47	1.2205 31	0.6693 17	0.5000 12.7	0.7205 18.3	0.1969 5	1/4-28 M6P0.75	0.19
SSUC205-13 SSUC205-14 SSUC205-15 SSUC205-16 SSUC205	7/8 15/16 1	25	2.0472 52	1.3425 34.1	0.6693 17	0.5630 14.3	0.7795 19.8	0.1969 5	1/4-28 M6P0.75	0.18
SSUC206-17 SSUC206-18 SSUC206-19 SSUC206-20 SSUC206	1 1/16 1 1/8 1 3/16 1 1/4	30	2.4409 62	1.5000 38.1	0.7480 19	0.6260 15.9	0.8740 22.2	0.1969 5	1/4-28 M6P0.75	0.16
SSUC207-20 SSUC207-21 SSUC207-22 SSUC207-23 SSUC207	1 1/4 1 5/16 1 3/8 1 7/16	35	2.8346 72	1.6890 42.9	0.7874 20	0.6890 17.5	1.0000 25.4	0.2756 7	5/16-24 M8P1.0	0.33
SSUC208-24 SSUC208-25 SSUC208	1 1/2 1 9/16	40	3.1496 80	1.9370 49.2	0.8661 22	0.7480 19	1.1890 30.2	0.3150 8	5/16-24 M8P1.0	0.31
SSUC209-26 SSUC209-27 SSUC209-28 SSUC209	1 5/8 1 11/16 1 3/4	45	3.3465 85	1.9370 49.2	0.8661 22	0.7480 19	1.1890 30.2	0.3150 8	5/16-24 M8P1.0	0.31
SSUC210-29 SSUC210-30 SSUC210-31 SSUC210-32 SSUC210	1 13/16 1 7/8 1 15/16 2S	50	3.5433 90	2.0315 51.6	0.9449 24	0.7480 19	1.2835 32.6	0.3937 10	3/8-24 M10P1.25	0.53
SSUC211-32 SSUC211-33 SSUC211-34 SSUC211-35 SSUC211	2 2 1/16 1 1/8 2 3/16	55	3.9370 100	2.1900 55.6	0.9843 25	0.8740 22.2	1.3150 33.4	0.3937 10	3/8-24 M10P1.25	0.50
SSUC212-36 SSUC212-37 SSUC212-38 SSUC212-39 SSUC212	2 1/4 2 5/16 2 3/8 2 7/16	60	4.3307 110	2.5630 65.1	1.0630 27	1.0000 25.4	1.5630 39.7	0.3937 10	3/8-24 M10P1.25	0.47

Calidad: AISI 440C
Quality: AISI 440C
Qualité: AISI 440C
Qualität: AISI 440C

RODAMIENTOS INOXIDABLES / STAINLESS STEEL BEARINGS

ROULEMENTS INOXIDABLES / ROSTFREIE LAGER

SS-SB20 - SS-CSB20

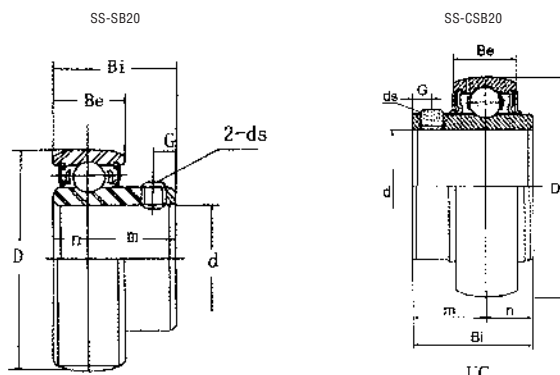


Rodamiento Bearing Unit Roulement Kugellager No.		Diám. orificio Bore dia. Diam. orifice Öffnungsquerschnitt d		Dimensiones (pulgadas) o (mm) Dimensions (in) or (mm) Dimensions (pouces) ou (mm) Abmessungen (Zoll) oder (mm)						Peso Weight Poids Gewicht (kg)		
		Pulgada / Inch Pouce / Zoll	(mm)	D	Bi	Be	n	m	G		Ds	
SS-SB201-8	SS-CSB201-8	1/2	12								0.08	
SS-SB201	SS-CSB201											
SS-SB202-9	SS-CSB202-9	9/16		1.5748	0.866	0.472	0.2362	0.630	0.1578	M5P0.8		
SS-SB202-10	SS-CSB202-10	5/8	15	40	22	12	6	16	4.5			
SS-SB202	SS-CSB202											
SS-SB203-11	SS-CSB203-11	11/16	17								0.7	
SS-SB203	SS-CSB203											
SS-SB204-12	SS-CSB204-12	3/4		1.8504	1.0630	0.5512	0.2756	0.780	0.1772	M5P0.8	0.065	
SS-SB204	SS-CSB204		20	47	25	14	7	18	4.5			
SS-SB205-14	SS-CSB205-14	7/8									0.16	
SS-SB205-15	SS-CSB205-15	15-16	25	2.0472	1.063	0.5906	0.2953	0.7677	0.1969	M6P0.75		
SS-SB205	SS-CSB205											
SS-SB205-16	SS-CSB205-16	1		52	27	15	7.5	19.5	5			
SS-SB206-18	SS-CSB206-18	1 1/8		2.4409	1.1220	0.6300	0.3150	0.8661	0.1969		0.25	
SS-SB206	SS-CSB206	1 1/4	30							M8P0.75		
SS-SB206-19	SS-CSB206-19	1 3/16		62	30	16	8	22	5.5			
SS-SB207-20	SS-CSB207-20	1 1/4									0.37	
SS-SB207-21	SS-CSB207-21	1 5/16								M8P1.0		
SS-SB207-22	SS-CSB207-22	1 3/8	35	2.8346	1.3386	0.6693	0.3346	0.9252	0.2362			
SS-SB207	SS-CSB207											
SS-SB207-23	SS-CSB207-23	1 7/16		72	32	17	8.5	23.5	6			
SS-SB208-24	SS-CSB208-24	1 1/2		3.1496	1.5354	0.7087	0.3543	0.9843	0.2756	M8P1.0	0.45	
SS-SB208-25	SS-CSB208-25	1 9/16	40									
SS-SB208	SS-CSB208			80	34	18	9	25	8			
SS-SB209-26	SS-CSB209-26	1 5/8									0.16	
SS-SB209-27	SS-CSB209-27	1 11/16	45	2.0472	1.063	0.5906	0.2953	0.7677	0.1969	M6P0.75		
SS-SB209-28	SS-CSB209-28	1 3/4										
SS-SB209	SS-CSB209			52	27	15	7.5	19.5	5			
SS-SB210-29	SS-CSB210-29	1 13/16									0.8	
SS-SB210-30	SS-CSB210-30	1 7/8		3.5433	1.7126	0.7474	0.4219	1.2835	0.3937	M8P1.0		
SS-SB210-31	SS-CSB210-31	1 15/16	50									
SS-SB210-32	SS-CSB210-32	2S										
SS-SB210	SS-CSB210			90	43.5	20	10.9	32.6	9			
SS-SB211-32	SS-CSB211-32	2									1.1	
SS-SB211-33	SS-CSB211-33	2 1/16								M8P1.0		
SS-SB211-34	SS-CSB211-34	1 1/8	55	3.9370	1.7835	0.8268	0.4646	1.3189	0.3937			
SS-SB211-35	SS-CSB211-35	2 3/16										
SS-SB211	SS-CSB211			100	45.3	21	11.8	33.5	10			
SS-SB212-36	SS-CSB212-36	2 1/4									1.3	
SS-SB212-37	SS-CSB212-37	2 5/16		4.3307	2.1142	0.8661	0.5866	1.5276	0.3937	M10P1.25		
SS-SB212-38	SS-CSB212-38	2 3/8	60									
SS-SB212-39	SS-CSB212-39	2 7/16										
SS-SB212	SS-CSB212			110	53.7	22	14.9	38.8	10			

Calidad: AISI 440C
Quality: AISI 440C
Qualité: AISI 440C
Qualität: AISI 440C

RODAMIENTOS INOXIDABLES / STAINLESS STEEL BEARINGS

ROULEMENTS INOXIDABLES / ROSTFREIE LAGER

SS-SA200 - SS-CSA200

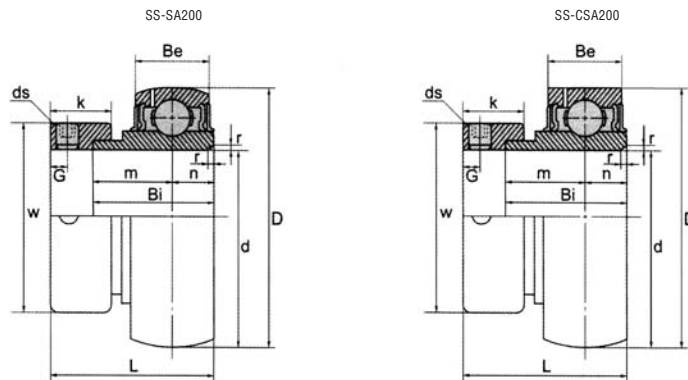


Número de la unidad Unit number Numéro de l'unité Stücknummer	Número de la unidad Unit number Numéro de l'unité Stücknummer	Diám. orificio Bore dia. Diám. orifice Öffnungsquerschnitt		Dimensiones (pulgadas) o (mm) Dimensions (in) or (mm) Dimensions (pouces) ou (mm) Abmessungen (Zoll) oder (mm)											Peso Weight Poids Gewicht (kg)
		Pulgada / Inch Pouce / Zoll	(mm)	Be	D	Bi	r	n	m	L	W	G	G	Ds	
SS-SA201-8	SS-CSA201-8	1/2	12												0.14
SS-SA202-9	SS-CSA202-9	9/16													0.13
SS-SA202-10	SS-CSA202-10	5/8		0.4724	1.5748	0.7520	0.0320	0.2362	0.5157	1.1250	1.1250	0.5315	0.1969	1/4-28	0.12
SS-SA203-11	SS-CSA203-11	11/16	15												0.12
SS-SA201	SS-CSA201			12	40	19.1	0.8	6	13.1	28.6	28.6	13.5	5	M6x0.75	0.11
SS-SA202	SS-CSA202		17												0.10
SS-SA203	SS-CSA203														
SS-SA204-12	SS-CSA204-12	3/4	20	0.5512	1.8504	0.8465	0.0590	0.2856	0.5709	1.2205	1.3110	0.5315	0.1969	1/4-28	0.15
SS-SA204	SS-CSA204			14	47	21.5	1.5	7.5	14	31	38.1	13.5	5	M6x0.75	0.16
SS-SA205-14	SS-CSA205-14	7/8		0.5906	2.0472	0.8465	0.0590	0.2953	0.5572	1.2205	1.5000	0.5315	0.1969	1/4-28	0.21
SS-SA205-15	SS-CSA205-15	15/16	25												0.19
SS-SA205-16	SS-CSA205-16	1		15	52	21.5	1.5	8	15.8	35.7	44.5	15.9	6	M6x0.75	0.18
SS-SA205	SS-CSA205														0.18
SS-SA206-17	SS-CSA206-17	1 1/16													0.34
SS-SA206-18	SS-CSA206-18	1 1/8		0.6299	2.4409	0.9370	0.0590	0.3150	0.6220	1.4055	1.7520	0.6260	0.2362	5/16-24	0.32
SS-SA206-19	SS-CSA206-19	1 3/16	30	16	62	23.8	1.5	8	15.8	35.7	44.5	15.9	6	M8x1	0.30
SS-SA206-20	SS-CSA206-20	1 1/4													0.29
SS-SA206	SS-CSA206														0.30
SS-SA207-20	SS-CSA207-20	1 1/4													0.55
SS-SA207-21	SS-CSA207-21	1 5/16		0.6693	2.8346	1.0000	0.0787	0.3346	0.6654	1.5315	2.1890	0.6890	0.2559	5/16-24	0.53
SS-SA207-22	SS-CSA207-22	1 3/8	35	17	72	25.4	2	8.5	16.9	38.9	55.6	17.5	6.5	M8x1	0.5
SS-SA207-23	SS-CSA207-23	1 7/16													0.47
SS-SA207	SS-CSA207														0.5
SS-SA208-24	SS-CSA208-24	1 1/2		0.7087	3.1496	1.1890	0.0787	0.3543	0.8346	1.7205	2.3740	0.7205	0.2559	5/16-24	0.67
SS-SA208-25	SS-CSA208-25	1 9/16	40	19	80	30.2	2	9.5	21.2	43.7	60.3	18.3	6.5	M8x1	0.65
SS-SA208	SS-CSA208														0.63
SS-SA209-26	SS-CSA209-26	1 5/8													0.74
SS-SA209-27	SS-CSA209-27	1 11/16		0.7480	3.3465	1.1890	0.0787	0.3740	0.8150	1.7205	2.5000	0.7205	0.2559	5/16-25	0.72
SS-SA209-28	SS-CSA209-28	1 3/4	45	19	85	30.2	2	9.5	20.7	43.7	63.5	18.3	6.5	M8x1	0.67
SS-SA209	SS-CSA209														0.66
SS-SA210-29	SS-CSA210-29	1 13/16													0.9
SS-SA210-30	SS-CSA210-30	1 7/8		0.2874	3.5433	1.1890	0.0787	3.3937	0.7953	1.7205	2.7520	0.7205	0.2254	5/16-24	0.86
SS-SA210-31	SS-CSA210-31	1 15/16		20	90	30.2	2	10	20.2	43.7	69.9	18.3	6.5	M10x1.25	0.83
SS-SA210-32	SS-CSA210-32	2S	50												0.79
SS-SA210	SS-CSA210														0.80
SS-SA211-32	SS-CSA211-32	2													0.95
SS-SA211-33	SS-CSA211-33	2 1/16		0.8207	3.9370	1.2795	0.0984	0.4134	0.8675	1.9063	3	0.8150	0.3150	3/8-24	0.91
SS-SA211-34	SS-CSA211-34	1 1/8		21	100	32.5	2.5	10.5	22	48.4	16.3	20.7	8	M10x1.25	0.86
SS-SA211-35	SS-CSA211-35	2 3/16	55												0.81
SS-SA211	SS-CSA211														0.77
SS-SA212-36	SS-CSA212-36	2 1/4													1
SS-SA212-37	SS-CSA212-37			0.8660	4.3310	1.4606	0.0984	0.4330	1.0276	2.0910	3.3150	0.8780	0.3150	3/8-24	1.98
SS-SA212-38	SS-CSA212-38		60	22	110	37.1	2.5	11	26.1	53.1	84.2	22.3	8	M10x1.25	0.99
SS-SA212-39	SS-CSA212-39	2 7/16													
SS-SA212	SS-CSA212														

Calidad: AISI 440C
Quality: AISI 440C
Qualité: AISI 440C
Qualität: AISI 440C

RODAMIENTOS INOXIDABLES / STAINLESS STEEL BEARINGS

ROULEMENTS INOXIDABLES / ROSTFREIE LAGER

SS-SER200

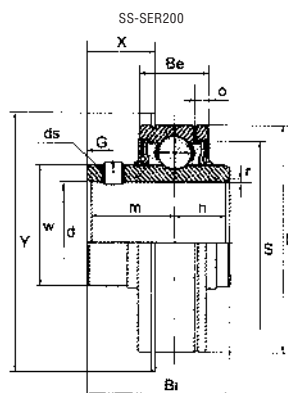

Rodamiento Bearing Unit Roulement Kugellager No.	Diám. orificio Bore dia. Diam. orifice Öffnungsquerschnitt d		Dimensiones (pulgadas) o (mm) Dimensions (in) or (mm) Dimensions (pouces) ou (mm) Abmessungen (Zoll) oder (mm)															Peso Weight Poids Gewicht (kg)
	Pulgada / Inch Pouce / Zoll	(mm)	D	Bi	Be	n	m	E	W	O	T	J	G	S	r	Y	X	
SS-SER201-8 SS-SER201	1/2	12																0.25
SS-SER202-9 SS-SER202-10 SS-SER202	9/16 5/8	15	1.8504 47	0.2189 31	0.6252 16	0.4512 11.5	0.7657 19.5	0.4366 11.1	1.1417 29	0.1575 4	0.0457 1.2	0.1402 3.6	0.1969 5	1.6252 41.3	0.040 1	2.0669 52.5	0.6402 16.3	
SS-SER203-11 SS-SER203	11/16	17																
SS-SER204-12 SS-SER204	3/4	20	1.8504 47	1.2189 31	0.6252 16	0.4512 11.5	0.7657 19.5	0.4366 11.1	1.1417 29	0.1575 4	0.0457 1.2	0.1402 3.6	0.1969 5	1.6252 41.3	0.040 1	2.0669 52.5	0.6402 16.3	
SS-SER205-13 SS-SER205-14 SS-SER205-15 SS-SER205-16 SS-SER205	13/16 7/8 15/16 1		2.0472 52	1 3/8 35	3/4 19	33/64 13.1	55/64 22	39/64 15	1 3/8 35	13/64 5	3/64 1.1	3/32 2.3	7/32 5.6	55/64 47	0.040 1	17/64 57	5/8 16	0.31
SS-SER206-17 SS-SER206-18 SS-SER206-19 SS-SER206-20 SS-SER206	1 1/16 1 1/8 1 3/16 1 1/4	30	2.4409 62	1 1/2 38	7/8 22	5/8 16	7/8 22	11/16 17	1 19/32 40	7/32 5.5	1/16 1.5	1/8 3	7/32 5.6	2 5/32 54	0.040 1	2 5/32 54	5/8 16	
SS-SER207-20 SS-SER207-21 SS-SER207-22 SS-SER207-23 SS-SER207	1 1/4 1 5/16 1 3/8 1 7/16	35	2.8346 72	1 11/16 43	15/16 24	11/16 17	1 25.4	3/4 19	55/64 47	7/32 5.5	1/16 1.5	1/8 3	1/4 6	2 9/16 65	0.040 1	3 5/64 78	23/32 18	
SS-SER208-24 SS-SER208-25 SS-SER208	1 1/2 1 9/16	40	3.1496 80	1 15/16 49	3/32 28	3/4 19	3/16 30	29/32 23	1/16 52	1/4 6	1/16 1.5	1/8 3	5/16 8	53/64 71	0.062 1.6	13/32 86	53/64 21	
SS-SER209-26 SS-SER209-27 SS-SER209-28 SS-SER209	1 5/8 1 11/16 1 3/4	45	3.3465 85	1 15/16 49	3/32 28	3/4 19	3/16 30	29/32 23	19/64 58	1/4 6	1/16 1.5	1/8 3	5/16 8	3 1/16 77	0.062 1.6	3 19/32 91	53/64 21	1.10
SS-SER210-29 SS-SER210-30 SS-SER210-31 SS-SER210-32 SS-SER210	1 13/16 1 7/8 1 15/16 2S	50	3.5433 90	2 1/32 52	1 1/16 29	3/4 19	1 9/32 33	29/32 23	2 15/32 62	19/64 7.5	3/32 2.3	1/8 3	3/8 9.5	3 71/32 81	0.062 1.6	3 25/32 96	15/16 24	
SS-SER211-32 SS-SER211-33 SS-SER211-34 SS-SER211-35 SS-SER211	2 2 1/16 2 1/8 2 3/16	55	3.9370 100	2 3/16 55.6	1 3/16 22	7/8 22	1 5/16 33	3 1/32 24.6	2 23/32 69	19/64 7.5	3/32 2.3	1/8 3	3/8 9.5	3 9/16 90	0.080 2	4 3/16 106	15/16 24	
SS-SER212-36 SS-SER212-37 SS-SER212-38 SS-SER212-39 SS-SER212	2 1/4 2 5/16 2 3/8 2 7/16	60	4.3307 110	2 9/16 65	1 1/4 31.8	1 25.4	1 9/16 39.6	1 1/32 26	3 31/32 75	19/64 7.5	3/32 2.3	1/8 3	7/16 11	3 15/16 100	0.080 2	4 19/32 116	1 5/32 29	

Calidad: AISI 440C
Quality: AISI 440C
Qualité: AISI 440C
Qualität: AISI 440C