



Hydraulic hoses



BASICS ON HYDRAULIC HOSES

Table keys

Size

The size is described by the internal diameter in inches, the rounded off to the integer figure in millimeters and the dash expressed in 1/16" fractions.

WD

Wire diameter. Minimum and maximum expressed in millimeters.

WP

Working pressure. The maximum recommended pressure indicates the selected hose and fitting which has to be equal or higher than the circuit's pressure. Expressed in Mega Pascal, MPa and Pound Square Inch, Psi.

BP

The pressure at which the hose is destroyed. Expressed in Mega Pascal, MPa and Pound Square Inch, Psi.

WT

The weight expressed in Kg/m.

ID

Internal diameter. Minimum and maximum expressed in millimeters.

OD

Outer diameter. Minimum and maximum expressed in millimeters in types A and AT.

PP

Proof pressure. The pressure at which hose is tested as defined by ISO Standard. Expressed in Mega Pascal, MPa and Pound Square Inch, Psi.

Min BR

Minimum Bending Radius. Bending the hose under this rated radii will provoke a loss of pressure and strength which may lead at the extreme, to a failure. Expressed in inch and the equivalent in mm.

SAE hoses. Description

SAE 100 R1

- Type A. Consisting of an inner tube of oil-resistant synthetic rubber. Reinforcement of a single wire braid.
- Cover of a synthetic rubber, weather and oil resistant.
- Used with petroleum based hydraulic fluids.
- Temperature range of -40°C to 100°C (-52°F to 212°F).
- Type AT. Same construction than A with the exception of the cover which is designed to use fittings without need to remove it.

SAE 100 R2

- Consisting of an inner tube of oil-resistant synthetic rubber. Reinforcement according type as indicated.
- Cover of a synthetic rubber, weather and oil resistant.
- Used with petroleum based hydraulic fluids.
- Temperature range of -40°C to 100°C (-52°F to 212°F).
- Type A. Two braids.
- Type B Two spiral and one braid.
- Type AT. Same construction than A with the exception of the cover which is designed to use fittings without need to remove it.
- Type BT. Same construction than B with the exception of the cover which is designed to use fittings without need to remove it.

SAE 100 R3

- Consisting of an inner tube of oil-resistant synthetic rubber.
- Reinforcement of two braids of textile yarn.
- Used with petroleum based hydraulic fluids.
- Cover of a synthetic rubber, weather and oil resistant.
- Temperature range of -40°C to 100°C (-52°F to 212°F).

SAE 100 R4

- Used in low pressure and vacuum applications.
- Consisting of an inner tube of oil-resistant synthetic rubber.
- Reinforcement of a ply or plies of woven or braided textile fibers with and spiral of body wire.
- Used with petroleum based hydraulic fluids.
- Temperature range of -40°C to 100°C (-52°F to 212°F).

SAE 100 R5

- Consisting of an inner tube of oil-resistant synthetic rubber.
- Reinforcement of two braids of textile yarn and an in-between high-tensile-strength steel-wire braid.
- Used with petroleum based hydraulic fluids.
- Cover of a synthetic rubber, weather and oil resistant.
- Temperature range of -40°C to 100°C (-52°F to 212°F).

SAE 100 R6

- Consisting of an inner tube of oil-resistant synthetic rubber.
- Reinforcement of one braided ply of textile yarn.
- Used with petroleum based hydraulic fluids.
- Cover of a synthetic rubber, weather and oil resistant.
- Temperature range of -40°C to 100°C (-52°F to 212°F).



SAE 100 R7

- Consisting of a thermoplastic hose.
- Used with petroleum based hydraulic fluids.
- Consisting of a thermoplastic inner tube resistant to hydraulic fluids.
- Reinforcement with a synthetic fiber.
- Cover of weather resisting thermoplastic.
- Temperature range of -40°C to 93°C (-52°F to 135°F).

SAE 100 R9

- Used with petroleum based hydraulic fluids.
- Temperature range of -40°C to 100°C (-52°F to 212°F).
- Type A. Consisting of an inner tube of oil-resistant synthetic rubber.
- Reinforcement consisting of four spiral plies of wire wrapped in alternating directions.
- Cover of oil and weather resisting.
- Type AT with the same construction than Type A with the exception the cover is designed not to require removal to assemble the fittings.

SAE 100 R13

- Used with petroleum based hydraulic fluids.
- Temperature range of -40°C to 100°C (-52°F to 212°F).
- Consisting of an inner tube of oil-resistant synthetic rubber.
- Reinforcement consisting of multiple spiral plies of heavy wire wrapped in alternating directions.
- Cover of oil and weather resisting.
- A ply or braid may be used over the inner tube and/or over the wire reinforcement to anchor the synthetic rubber to the wire.

SAE 100 R15

- Used with petroleum based hydraulics fluids.
- Temperature range from -40°C to 121°C (-52°F to 250°F)
- Consisting of an inner tube of oil-resistant synthetic rubber, multiple spiral plies of heavy wire wrapped in alternate directions.
- Cover of oil and weather-resistant rubber cover
- A ply or braid may be used over the inner tube and/or the wire reinforcement to anchor the synthetic rubber to the wire.

SAE 100 R17

- Used with petroleum based hydraulic fluids.
- Temperature range from -40°C to 121°C (-52°F to 250°F).
- Inner tube of Black NBR.
- Reinforcement of one or two wire braid oh high tensile strength.
- Cover of oil and weather-resistant neoprene or rubber
- Smaller bend radius than 100 R1 and 100 R2.

SAE 100 R8

- Consisting of a high pressure thermoplastic hose.
- Used with petroleum based hydraulic fluids.
- Consisting of a thermoplastic inner tube resistant to hydraulic fluids.
- Reinforcement with a synthetic fiber.
- Cover of weather resisting thermoplastic.
- Temperature range of -40°C to 93°C (-52°F to 135°F).
- Similar pressure than 100 R2.

SAE 100 R12

- Used with petroleum based hydraulic fluids.
- Temperature range of -40°C to 100°C (-52°F to 212°F).
- Consisting of an inner tube of oil-resistant synthetic rubber.
- Reinforcement consisting of four spiral plies of heavy wire wrapped in alternating directions.
- Cover of oil and weather resisting.
- A ply or braid may be used over the inner tube and/or over the wire reinforcement to anchor the synthetic rubber to the wire.

SAE 100 R14

- Used with petroleum based hydraulic fluids.
- Temperature range of -54°C to 204°C (-65°F to 400°F).
- Type A.- Consisting of an inner tube of polytetrafluoroethylene (PTFE) reinforced by a single stainless steel braid of type 303.
- Type B.- Has the same construction as type A, but B has an additional feature of an electrically-conductive inner surface to prevent build-up of an electrostatic charge.

SAE 100 R16

- Used with petroleum based hydraulic fluids.
- Temperature range from -40°C to 121°C (-52°F to 250°F).
- Consisting of an inner tube of oil-resistant synthetic rubber, steel wire reinforcement of one or two braids.
- Cover of oil and weather-resistant rubber cover.
- A ply or braid may be used over the inner tube and/or the wire reinforcement to anchor the synthetic rubber to the wire.

EN hoses. Description

DIN EN 853

This European Standard specifies requirements for four types of wire braid reinforced hoses and hose assemblies of nominal bore from 5 to 51. Used with petrol and water base fluids. Temperatures range from -40°C to 100°C in petrol base fluids and -40°C to 70°C in water based fluids.

DIN EN 853 1ST

Medium pressure hydraulic hose. Meets or exceeds the requirements of SAE 100 R1 AT. One braid of high tensile steel-wire. Black tube oils resistant of synthetic fiber. Temperature range of -40°C to 121°C. Cover of abrasion resistant synthetic rubber.

DIN EN 853 1SN

Medium pressure hydraulic hose. Meets or exceeds the requirements of SAE 100 R1 AT. One braid of high tensile steel-wire. Black tube oils resistant of synthetic fiber. Temperature range of -40°C to 121°C. Cover of abrasion resistant synthetic rubber.

DIN EN 853 2SN

High pressure hydraulic hose. Meets or exceeds the requirements of 100 R2 AT. Two braids of high tensile steel-wire. Black tube oils resistant of synthetic fiber. Temperature range of -40°C to 121°C. Cover of abrasion resistant synthetic rubber.

DIN EN 853 2ST

Medium pressure hydraulic hose. Meets or exceeds the requirements of 100 R2 AT. Two braids of high tensile steel-wire. Black tube oils resistant of synthetic fiber. Temperature range of -40°C to 121°C. Cover of abrasion resistant synthetic rubber. Cover is thinner than 1SN and thus not suitable for skive applications.

DIN EN 854

This European Standard specifies requirements for three types of textile reinforced rubber hoses and hose assemblies of nominal bore from 5 to 100. Used with petrol and water base fluids. Temperatures range from -40°C to 100°C in petrol base fluids and -40°C to 70°C in water based fluids.

DIN EN 854 2TE

Medium pressure hydraulic hose with high resistance to kick and impulse fatigue. Inner tube of black seamless synthetic rubber. Double textile braid and abrasion and weather resistant synthetic rubber.

DIN EN 856

This European Standard specifies requirements for four types of rubber-covered spiral wire reinforced hydraulic hoses and hose assemblies of nominal bore from 6 to 51. Types, 4SP, 4SH, R12 and R13. Used with petrol and water base fluids. Temperatures range from -40°C to 100°C for types aSP and 4SH and -40°C to 120°C for types R12 and R13.

DIN EN 856 4SH

Very high pressure hydraulic hose. Inner tube of oil resistant synthetic rubber, four spiral plies of steel wire wrapped in alternating direction. Exceed pressures than SAE 100R12. Indicated for high impulse like forestry and mining applications. Black smooth or black corrugated. Oil, weather and abrasive resistant synthetic rubber cover.

DIN EN 857

This European Standard specifies requirements for two types of wire braid reinforced compact hoses and hose assemblies of nominal bore from 6 to 25. Types 1SC and 2SC. Temperatures range from -40°C to 100°C in petrol base fluids and -40°C to 70°C in water based fluids.

DIN EN 857 2SC

High pressure hydraulic hose. Exceeds pressure that of SAE 100R2 and SAE 100 R16 with tighter BR. Two hight tensile wire braids. Oil resistant tube. Oil and weather resistant synthetic rubber cover.

DIN EN 854 1TE

Low pressure hydraulic hose. Single textile braid. Environment resistant synthetic rubber covers the tube to keep it away from chemicals, ozone and adverse factors. Tube oil resistant nitrile, compatible with petroleum based hydraulic fluids. Temperature range -40°C to 100°C. Wide use in low pressure lines, return and dry lines.

DIN EN 854 3TE

Medium pressure hydraulic hose with high flexibility due to its two textile braids. Indicated for suction and return hydraulic. Inner tube of oil and water resistant synthetic rubber and oil and weather resistant cover. Double textile braids.

DIN EN 856 4SP

Very high pressure hydraulic hose. Inner tube of oil resistant synthetic rubber, four spiral plies of steel wire wrapped in alternating direction. Exceed pressures than SAE 100R12. Indicated for high impulse like forestry and mining applications. Black corrugated. Oil, weather and abrasive resistant synthetic rubber cover.

DIN EN 857 1SC

High pressure hydraulic hose. Exceeds pressure that of SAE 100R1 with tighter BR. One single wire braid. Ozone and weather resistant cover.

Working pressures bar and psi

| BAR | SIZE | | | | | | | | | | |
|------------|-------|------|-------|------|------|------|------|-----|--------|--------|-----|
| | 3/16" | 1/4" | 5/16" | 3/8" | 1/2" | 5/8" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| SAE100R1 | 210 | 192 | 175 | 158 | 140 | 105 | 87 | 70 | 43 | 35 | 26 |
| SAE100R2 | 350 | 350 | 297 | 280 | 245 | 192 | 157 | 140 | 113 | 87 | 78 |
| SAE100R3 | 105 | 87 | 84 | 78 | 70 | 61 | 52 | 39 | 26 | | |
| SAE100R4* | | | | | | | 21 | 17 | 14 | 10,5 | 7 |
| SAE100R5* | 210 | 210 | 157 | | 122 | 105 | | | | | |
| SAE100R6 | 35 | 28 | 28 | 28 | 28 | 24 | 21 | | | | |
| SAE100R7 | 210 | 192 | 175 | 157 | 140 | 105 | 87 | 70 | | | |
| SAE100R8 | 350 | 350 | | 280 | 245 | 192 | 157 | 140 | | | |
| SAE100R9 | | | | 315 | 280 | | 210 | 210 | 175 | 140 | 140 |
| SAE100R12 | | | | 280 | 280 | 280 | 280 | 280 | 210 | 175 | 175 |
| SAE100R13 | | | | | | 350 | 350 | 350 | 350 | 350 | 350 |
| SAE100R14* | | | | | | | | | | | |
| SAE100R15 | | | | 420 | 420 | | 420 | 420 | 420 | 420 | 420 |
| SAE100R16 | | 350 | 300 | 280 | 250 | 190 | 160 | 140 | 110 | | |
| SAE100R17 | | 210 | 210 | 210 | 210 | 210 | 210 | 210 | | | |
| EN853 1SN | 250 | 225 | 215 | 180 | 160 | 130 | 105 | 88 | 63 | 50 | 40 |
| EN853 2SN | 415 | 400 | 350 | 330 | 275 | 250 | 215 | 165 | 125 | 90 | 80 |
| EN854 1TE | 25 | 25 | 20 | 20 | 16 | 16 | | | | | |
| EN854 2TE | 80 | 75 | 68 | 63 | 58 | 50 | 45 | 40 | | | |
| EN8564 3TE | 160 | 145 | 130 | 110 | 93 | 80 | 70 | 55 | 45 | 40 | 33 |
| EN856 4SP | | 450 | | 445 | 415 | 350 | 350 | 280 | 210 | 185 | 165 |
| EN856 4SH | | | | | | | 420 | 380 | 325 | 290 | 250 |
| EN857 1SC | | 225 | 215 | 180 | 160 | 130 | 105 | 88 | | | |
| EN857 2SC | | 400 | 350 | 330 | 275 | 250 | 215 | 165 | | | |

| BAR | SIZE | | | | BAR | SIZE | | | | | | |
|-----------|--------|----|--------|-----|-----------|--------|------|--------|--------|----------|--------|----|
| | 2 1/2" | 3" | 3 1/2" | 4" | | 13/32" | 7/8" | 1 1/8" | 1 3/8" | 1 13/16" | 2 3/8" | 3" |
| SAE100R4* | 4 | 4 | 3 | 2,5 | *SAE100R5 | 140 | 56 | 43 | 35 | 24 | 24 | 14 |

| BAR | mm | | | | | | | | | |
|------------|-----|-----|-----|----|------|----|----|----|----|----|
| | 6,3 | 8 | 10 | 11 | 12,5 | 16 | 19 | 22 | 25 | 29 |
| SAE100R14* | 105 | 105 | 105 | 70 | 56 | 56 | 56 | 56 | 56 | 42 |

| PSI | SIZE | | | | | | | | | | |
|------------|-------|------|-------|------|------|------|------|------|--------|--------|------|
| | 3/16" | 1/4" | 5/16" | 3/8" | 1/2" | 5/8" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| SAE100R1 | 3045 | 2780 | 2540 | 2280 | 2030 | 1520 | 1260 | 1015 | 620 | 510 | 380 |
| SAE100R2 | 5075 | 5075 | 4310 | 4060 | 3550 | 2780 | 2280 | 2030 | 1640 | 1260 | 1130 |
| SAE100R3 | 1520 | 1260 | 1220 | 1130 | 1015 | 885 | 750 | 570 | 3080 | | |
| SAE100R4* | | | | | | 305 | 250 | 200 | 150 | 100 | |
| SAE100R5* | 3045 | 3045 | 2270 | | 1770 | 1520 | | | | | |
| SAE100R6 | 510 | 410 | 410 | 410 | 410 | 350 | 310 | | | | |
| SAE100R7 | 3045 | 2780 | 2535 | 2275 | 2030 | 1520 | 1260 | 1015 | | | |
| SAE100R8 | 5075 | 5075 | | 4060 | 3550 | 2780 | 2275 | 2030 | | | |
| SAE100R9 | | | | 4570 | 4060 | | 3045 | 3045 | 2540 | 2030 | 2030 |
| SAE100R12 | | | | 4060 | 4060 | 4060 | 4060 | 3045 | 2540 | 2540 | |
| SAE100R13 | | | | | | 5075 | 5075 | 5075 | 5075 | 5075 | |
| SAE100R14* | | | | | | | | | | | |
| SAE100R15 | | | | 6090 | 6090 | | 6090 | 6090 | 6090 | 6090 | |
| SAE100R16 | | 5075 | 4305 | 4060 | 3550 | 2780 | 2275 | 2030 | 1635 | | |
| SAE100R17 | | 3045 | 3045 | 3045 | 3045 | 3045 | 3045 | 3045 | | | |
| EN853 1SN | 3625 | 3260 | 3120 | 2610 | 2320 | 1885 | 1520 | 1280 | 910 | 725 | 580 |
| EN853 2SN | 6020 | 5800 | 5075 | 4785 | 3990 | 3625 | 3120 | 2390 | 1810 | 1305 | 1160 |
| EN854 1TE | 363 | 363 | 290 | 290 | 232 | 232 | | | | | |
| EN854 2TE | 1160 | 1088 | 986 | 914 | 841 | 725 | 653 | 580 | | | |
| EN8564 3TE | 2320 | 2103 | 1885 | 1595 | 1349 | 1160 | 1015 | 798 | 653 | 580 | 479 |
| EN856 4SP | | 6525 | | 6450 | 6020 | 5075 | 5075 | 4060 | 3045 | 2680 | 2390 |
| EN856 4SH | | | | | | 6090 | 5510 | 4710 | 4205 | 3625 | |
| EN857 1SC | | 3260 | 3120 | 2610 | 2320 | 1885 | 1520 | 1280 | | | |
| EN857 2SC | | 5800 | 5075 | 4785 | 3990 | 3625 | 3120 | 2390 | | | |


| BAR | SIZE | | | | BAR | SIZE | | | | | | |
|-----------|--------|----|--------|----|-----------|--------|------|--------|--------|----------|--------|-----|
| | 2 1/2" | 3" | 3 1/2" | 4" | | 13/32" | 7/8" | 1 1/8" | 1 3/8" | 1 13/16" | 2 3/8" | 3" |
| SAE100R4* | 60 | 60 | 40 | 40 | *SAE100R5 | 2030 | 810 | 620 | 510 | 350 | 350 | 200 |

| BAR | mm | | | | | | | | | |
|------------|------|------|------|------|------|-----|-----|-----|-----|-----|
| | 6,3 | 8 | 10 | 11 | 12,5 | 16 | 19 | 22 | 25 | 29 |
| SAE100R14* | 1523 | 1523 | 1523 | 1015 | 812 | 812 | 812 | 812 | 812 | 609 |


How to measure hose assemblies

The hose length will be a result of the distance between the two ends to which to add the buffer length for bends required by the routing as well as the fitting ends.


Description of the standard measuring according the type of fitting ends the application requests ensue.




Male threads.
Measuring reference point is the tip end.




Female threads, JIC, SAE, NPSM.
Measuring reference point is the end of the nut.

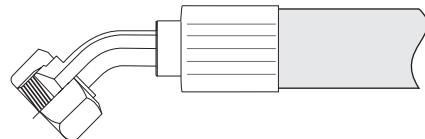


Elbow fittings.
Measuring reference point is the tip of the nut at the Center.

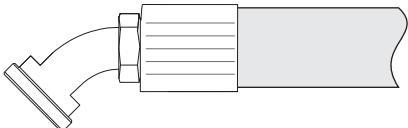




Flange elbow.
Measuring reference point is the tip of the flange at the Center.




Female threads, DIN, BSP, OFS.
Measuring reference point is the tip of the sealing head.



Flange fittings straight.
Measuring reference point is the tip end of the flange.

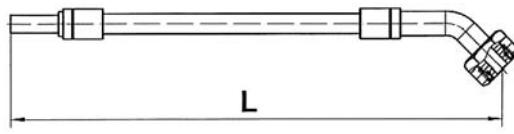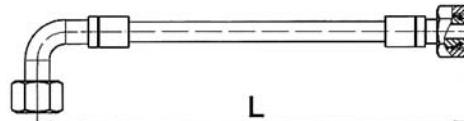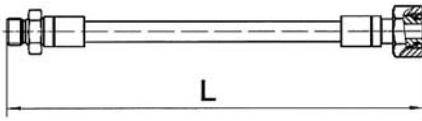

The cut off factor of a hose assembly is the distance C in the diagram below. The hose length will result after deducting the cut off factor.

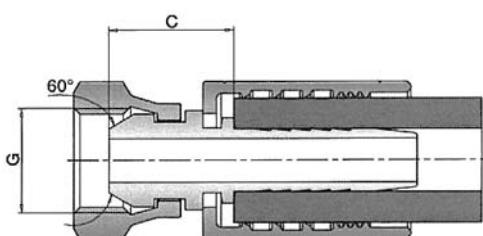


How to order hose assemblies


Different considerations must be taken into account at the time of ordering hose assemblies.

The type of the hose needed is determined by the application and above all the working pressure and the temperature of the fluid as well as the environment. As far as the pressure is concerned the working pressures are disclosed in the tables displayed. Concern on burst pressure is relevant, as the longer time the hose is used, the burst pressure will decrease and this factor is important to be taken into consideration.

The length of the hose is has to be decided according the application, having in mind that one thing is the length of the hose and another thing is the total length of the hose as, the end fittings have to be counted on as well as a safety length of the hose depending on the application, whether the application is static or have a movement and most important, the routing of the hose. Directions henceforward are described to help in the selection with all the elements in play.

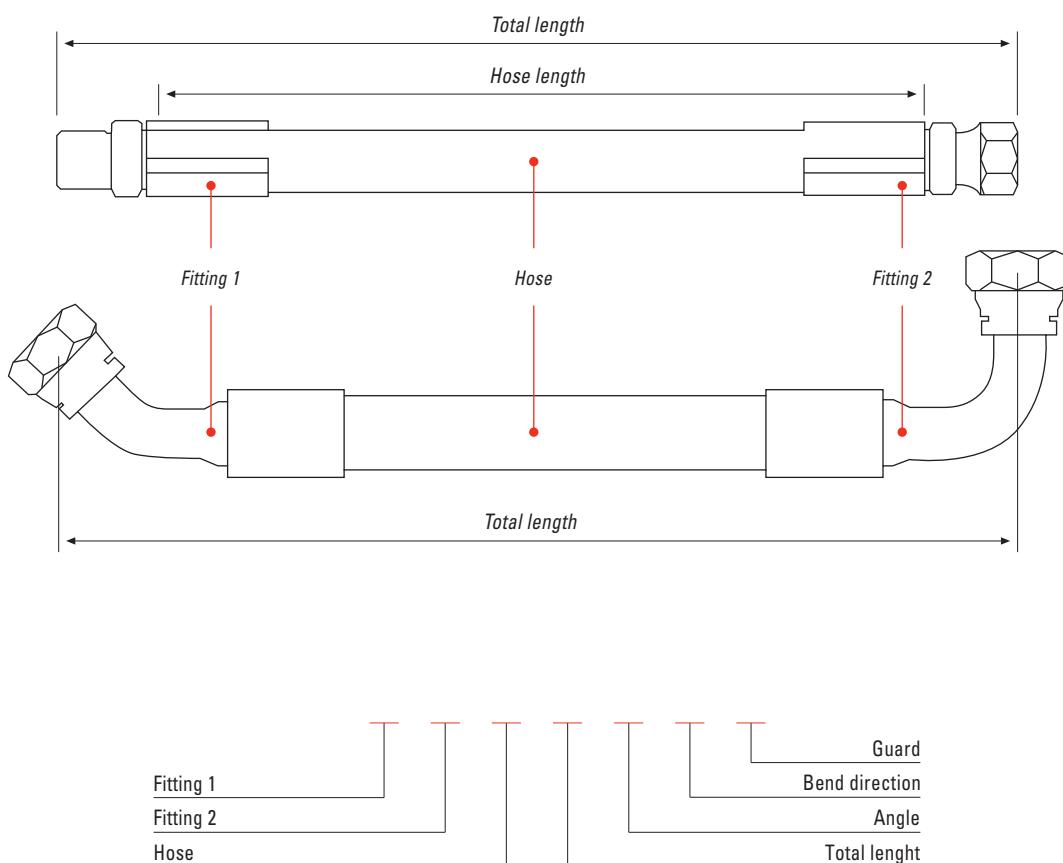

The routing of the hose has to take into account the bending of the hose. Bending a hose under the rated radius will reduce its life expectancy. Also the routing has to avoid kinking, twisting, abrasion, sharp corners, falling objects and high temperatures which can create stress to the hose and in consequence reduce the life expectancy as well.

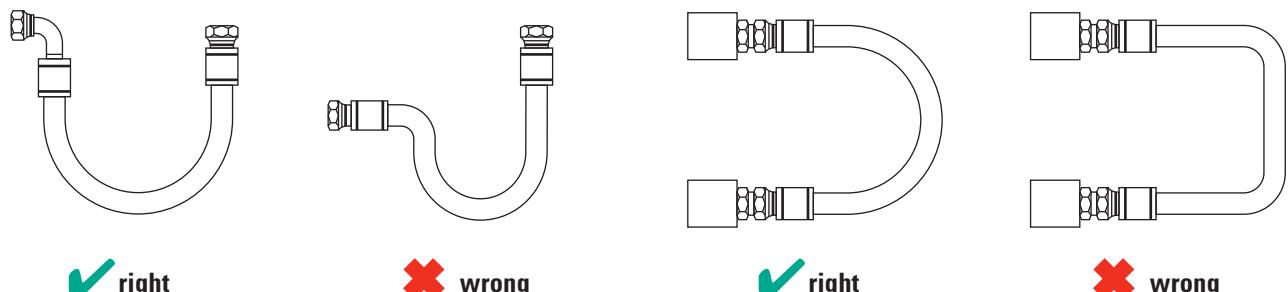

By increasing the length of the hose, the stress created to the hose by tight angles is relieved giving a longer life expectancy to the hose.

Conversion table of common used measure-units in hydraulics

| | | | |
|-----------------------------------|--|--------------------------------------|------------------------|
| LENGTH | 1 inch (in) | | 25,4 mm |
| | 1 foot (ft) | 12 inches (in) | 0,3048 m |
| | 1 yard (yd) | 3 feet (ft) | 0,9144 m |
| | 1 mile (mi) | 5280 (ft) | 1609,34 m |
| | 1 millimeter (mm) | | 0,03937 in |
| | 1 meter | | 3.28084 ft |
| AREA | 1 square foot (ft ²) | 144 square inches | 0,0929 m ² |
| | 1 square inch (in ²) | | 6,4516 cm ² |
| | 1 square centimeter (cm ²) | | 0,155 in ² |
| VOLUME | 1 cubic foot (ft ³) | 1728 cubic inches (in ³) | 28,316 liter |
| | 1 gallon UK | | 4,54596 liter |
| | 1 gallon US | | 3,78533 liter |
| WEIGHT | 1 pound (lb) | 16 ounces (oz) | 0,453592 Kg |
| | 1 short ton US | 2000 (lb) | 907,18 Kg |
| | 1 long ton UK | 2240 (lb) | 1016,05 Kg |
| | 1 Kilogram | | 2,204022 lb |
| FLOW | 1 gallon per minute UK | | 4,54596 lit/min |
| | 1 gallon per minute US | | 3,78533 lit/min |
| | 1 liter per minute | 0,264178 gal/min US | 0,219976 gal/min UK |
| TORQUE | 1 meter*Newton (mN) | | 0,67197 feet*pound |
| | 1 feet*pound (ftLb) | | 1,48816 mN |
| TEMPERATURE | °C Celsius . °Farenheit | | °F=(9C+160)/5 |
| HEAT | 1 BTU = 1054,35 Joules | 1 cal = 4,184 Joules | 1 BTU = 251,996 cal |
| Other measures used in hydraulics | | | |
| VISCOSITY | SUS (Saybolt Universal Seconds) | | |
| | cSt (Centistoke) | | |

Most common fractions of an inch with mm equivalents

| 1/64 | 1/32 | 3/64 | 1/16 | 5/64 | 3/32 | 7/64 | 1/8 | 9/64 | 5/32 | 11/64 | 3/16 |
|--------|--------|--------|---------------|--------|--------|--------|---------------|--------|--------|--------|---------------|
| 0,397 | 0,794 | 1,191 | 1,588 | 1,984 | 2,381 | 2,778 | 3,175 | 3,572 | 3,969 | 4,366 | 0,476 |
| 13/64 | 7/32 | 15/64 | 1/4 | 17/64 | 9/32 | 19/64 | 5/16 | 21/64 | 11/32 | 23/64 | 3/8 |
| 5,159 | 5,556 | 5,953 | 6,350 | 6,747 | 7,144 | 7,541 | 7,938 | 8,334 | 8,731 | 9,128 | 9,525 |
| 25/64 | 13/32 | 27/64 | 7/16 | 29/64 | 15/32 | 31/64 | 1/2 | 33/64 | 17/32 | 35/64 | 9/16 |
| 9,922 | 10,319 | 10,716 | 11,11 | 11,509 | 11,906 | 12,303 | 12,700 | 13,097 | 13,494 | 13,889 | 14,288 |
| 37/64 | 19/32 | 39/64 | 5/8 | 41/64 | 21/32 | 43/64 | 11/16 | 45/64 | 23/32 | 47/64 | 3/4 |
| 14,684 | 15,081 | 15,478 | 15,875 | 16,272 | 16,669 | 17,066 | 17,463 | 17,859 | 18,256 | 18,653 | 19,050 |
| 49/64 | 25/32 | 51/64 | 13/16 | 53/64 | 27/32 | 55/64 | 7/8 | 57/64 | 29/32 | 59/64 | 15/16 |
| 19,447 | 19,844 | 20,241 | 20,638 | 21,034 | 21,431 | 21,828 | 22,225 | 22,622 | 23,019 | 23,416 | 23,813 |
| 61/64 | 31/32 | 63/64 | 1 | | | | | | | | |
| 24,209 | 24,609 | 25,003 | 25,40 | | | | | | | | |

Common pressure measure

| | bar | mbar | Pa | kPa | Mpa | Torr | inHg | mWS | atm | at | Psi |
|--------|--------------------------|--------------------------|-------------------------|--------------------------|--------------------------|--------------------------|-------------------------|--------------------------|---------------------------|-----------------------|------------------------|
| 1 bar | 1 | 10 ³ | 10 ⁵ | 100 | 0,1 | 750,064 | 29,53 | 10,1972 | 0,986923 | 1,02 | 14,5 |
| 1 mbar | 10 ⁻³ | 1 | 100 | 0,1 | 0,1*10 ⁻³ | 750,064*10 ⁻³ | 29,53*10 ⁻³ | 10,197*10 ⁻³ | 0,986923*10 ⁻³ | 1,02*10 ⁻³ | 14,50*10 ⁻³ |
| 1 Pa | 10 ⁻⁵ | 0,01 | 1 | 10 ⁻³ | 10 ⁻⁶ | 7,50064*10 ⁻³ | 0,2953*10 ⁻³ | 101,97 | 9,86923*10 ⁻⁶ | 0,01*10 ⁻³ | 0,145*10 ⁻³ |
| 1 kPa | 0,01 | 10 | 10 ³ | 1 | 10 ⁻³ | 7,50064 | 0,2953 | 101,972*10 ⁻³ | 9,86923*10 ⁻³ | 0,01 | 0,145 |
| 1 Mpa | 10 | 10*10 ³ | 10 ⁶ | 10 ³ | 1 | 7,50064*10 ³ | 295,3 | 101,972 | 9,86923 | 10,2 | 145 |
| 1 Torr | 1,33322*10 ⁻³ | 1,33322 | 133,322 | 133,322*10 ⁻³ | 133,322*10 ⁻⁶ | 1 | 0,03937 | 13,5951*10 ⁻³ | 1,31579*10 ⁻³ | 1,36*10 ⁻³ | 0,0194 |
| 1 inHg | 0,03386 | 33,86 | 3,387*10 ³ | 3,387 | 3,387*10 ⁻³ | 25,4 | 1 | 345,40*10 ⁻³ | 0,03342 | 0,0345 | 0,491 |
| 1 mWS | 98,0665*10 ⁻³ | 98,0665 | 9,80665*10 ³ | 9,80665 | 9,80665*10 ⁻³ | 73,5561 | 2,904 | 1 | 96,7841*10 ⁻³ | 99,9*10 ⁻³ | 1,422 |
| 1 atm | 1,01325 | 1,01325*10 ⁻³ | 101,325*10 ³ | 101,325 | 101,325*10 ⁻³ | 760 | 29,92 | 10,3323 | 1 | 1,033 | 14,69 |
| 1 ata | 0,9803 | 980,3 | 98,07*10 ³ | 98,07 | 98,07*10 ⁻³ | 735,56 | 28,96 | 10,01 | 0,968 | 1 Kp/cm ² | 14,22 |
| 1 Psi | 0,0689 | 68,9 | 6,893*10 ³ | 6,893 | 6,893*10 ⁻³ | 51,71 | 2,036 | 0,70309 | 0,068 | 0,0703 | 1 |

Norms & Types

| | | | |
|-------|--|---------|-----------------------------------|
| DIN | Deutsches Institute für Normung | BSP | British Standard Pipe |
| ISO | International Organization for Standardization | BSPT | British Standard Pipe Taper |
| SAE | Society of Automotive Engineers | BSPP | British Standard Pipe Parallel |
| ASTM | American Society for Testing Materials | NPT | National Pipe Thread |
| AISI | American Iron and Steel Institute | NPSM | National Pipe Straight Mechanical |
| ANSI | American National Standard Institute | JIC | Joint Industrial Council |
| EN | European Norm | UTS | Unified Thread Standad |
| JIS | Japanese Industrial Standards | UNC-UNF | (Coarse-Fine-Extrafine) |
| GB | Guobiao/Tujian | ORFS | O-ring Flat Seal |
| GB/T | (National Standard/Recommended) | ORB | O-ring Boss |
| CETOP | Comité Européen des Transmissions Oléohydrauliques et Pneumatiques | | |
| NFPA | National Fluid Power Association | | |

Materials

The chart hereinunder displays the materials of seals most commonly used in hydraulics with the temperature range

| ASTM CODE | CHEMICAL DESCRIPTION | RANGE OF TEMPERATURE | TRADE NAME |
|-----------|------------------------------------|----------------------|------------|
| NBR | Acrylonitril-Butadiene-Elastomer | -30°C to 100°C | Buna |
| EPDM | Ethilene-Propylene-Diene-Elastomer | -50°C to 150°C | Epdm |
| FKM | Fluorelastomer | -20°C to 200°C | Viton |
| PTFE | Polytetrafluoroethylene | -200°C to 230°C | Teflon |
| SBR | Styrene-Butadiene | -25°C to 100°C | Sbr |
| VMQ | Silicone elastomer | -40°C to 200°C | Silicone |
| CR | Polychloroprene | -35°C to 100°C | Neoprene |

CONSIDERATIONS ON SAFETY

Selection of hoses, tubes, fittings, adaptors and other related components

Hydraulic circuits use fluids under pressure and in many applications, high pressure, what makes that the elements selected to be under stress which eventually may result in a burst and thus to be a potential danger to cause serious injuries either to the persons or property and even death. In consequence a proper selection of all the elements of the hydraulic circuit is fundamental.

The failure of any of the elements of the circuit may provoke that a fitting, a ferrule, an adaptor to be projected violently with dangerous consequences or the burst of hose may provoke the fluid to discharge at high pressure and pierce people or burn the fluid provoking an explosion, or electrocution may occur in case of high voltage lines are involved in the scenery of the failure. Upon that, the contact with the fluid may produce dangerous inhalation, ingestion of a toxic product with consequences potentially dangerous.

The selection of the elements composing a hydraulic circuit is a fundamental step when considering the safety.

The selection of the elements of a hydraulic circuit has a well-structured procedure defined by the wide world industry standard known as STAMPED which stand for:

| | |
|---|-------------|
| S | SIZE |
| T | TEMPERATURE |
| A | APPLICATION |
| M | MEDIA |
| P | PRESSURE |
| E | ENDS |
| D | DELIVERY |

Size, temperature, application, media, pressure, ends, and delivery

Size. Refers to the id, internal diameter of the hose as this measure and of course the length defines the size of a hydraulic hose. Internal diameter is the base for calculating parameters of the circuit, as flow and pressure. The od, outer diameter it may be critical when the hose has to go through narrow holes or if in confined areas. Conversely the od, outer diameter is a the basic size when defining a tubing.

Temperature. Refers to temperature of the flowing fluid along the hose. Account must be taken of the friction and the external temperature as well as whether the fluid experiments pulses or temperature spikes when choosing the hose based on the recommendation tables of the manufacturer.

Application. Refers to the use of the hose in the particular application, which may require a hose resistant to oil products, to sunlight, to chemical products, to very high pressure, a pulsating pressure. In every other use the choice has to be adapted to the particular application.

Media. Refers basically to the composition of the material that has to be conveyed along the hose, that is, abrasive, caustic, acid or any other chemical component. The fluid thus will determine the hose to be chosen based on the resistance of the hose to different agents.

Pressure. Refers to the pressure operating in the hydraulic circuit. The manufacturer provides details of the recommended pressure any model can stand up to. This measure of the pressure refers to the working pressure. The burst pressure means the pressure at which the hose will burst. The burst pressure usually has a factor of 4:1 referred to working pressure. When selecting the hose a very careful consideration must be taken to surges or spikes of pressure if any, as out of all the other factors having influence in the selection of a hose, the inadequacy of the pressure has the highest potential of injury or harm.

Ends. Refers to the fittings to mount at both ends of the hose and the way they have to be coupled. Consideration must be taken that the hydraulic circuit will be rated according the lesser pressure rate of any element of the circuit.

Delivery. Refers to the end user requirements, either testing, markings, lengths, special forms in case of tubing, packaging, quality or test certificates and others posed on by the user.

Maintenance hints to observe on a hydraulic circuit or installation



- ✓ PROTECTION OF PERSONS AND PROPERTIES.
- ✓ REGULAR INSPECTION OF THE HYDRAULIC CIRCUIT FOR LEAKS AND WEAR.
- ✓ APPROACH WITH CAUTION TO A PRESSURIZED HYDRAULIC CIRCUIT.
- ✓ REPLACE THE POTENTIAL MISFIT ELEMENTS OF THE CIRCUIT WHENEVER NEEDED TO.
- ✓ OBSERVE POTENTIAL EXTERNAL CAUSES WHICH MAY ENDANGER THE CIRCUIT.

HYDRAULIC HOSES TYPES

SAE 100 R1

Wrapped steel wire reinforced cover



| SIZE | | | | | | | | | | | | | | | | | | | |
|------|-------|------|------|------|------|------|------|------|------|------|------|-----|------|-----|-------|---------|-----|------|--|
| | | | I.D | | W.D | | O.D | | | W.P | | P.P | | B.P | | min B.R | | W.T | |
| mm | inch | dash | min | max | min | max | min | max | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m | |
| 5 | 3/16 | -3 | 4.6 | 5.4 | 8.9 | 10.1 | 11.9 | 13.5 | 12.5 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 3.54 | 90 | 0.20 | |
| 6.3 | 1/4 | -4 | 6.2 | 7.0 | 10.6 | 11.7 | 15.1 | 16.7 | 14.1 | 19.2 | 2780 | 39 | 5580 | 77 | 11165 | 3.94 | 100 | 0.25 | |
| 8 | 5/16 | -5 | 7.7 | 8.5 | 12.1 | 13.3 | 16.7 | 18.3 | 15.7 | 17.5 | 2540 | 35 | 5075 | 70 | 10150 | 4.53 | 115 | 0.31 | |
| 10 | 3/8 | -6 | 9.3 | 10.1 | 14.5 | 15.7 | 19.0 | 20.6 | 18.1 | 15.7 | 2280 | 32 | 4570 | 63 | 9135 | 4.92 | 125 | 0.36 | |
| 12.5 | 1/2 | -8 | 12.3 | 13.5 | 17.5 | 19.0 | 22.2 | 23.8 | 21.5 | 14 | 2030 | 28 | 4060 | 56 | 8120 | 7.09 | 180 | 0.45 | |
| 16 | 5/8 | -10 | 15.5 | 16.7 | 20.6 | 22.2 | 25.4 | 27.0 | 24.7 | 10.5 | 1520 | 21 | 3045 | 42 | 6090 | 8.07 | 205 | 0.52 | |
| 19 | 3/4 | -12 | 18.6 | 19.8 | 24.6 | 26.2 | 29.4 | 31.0 | 28.6 | 8.7 | 1260 | 18 | 2540 | 35 | 5075 | 9.45 | 240 | 0.65 | |
| 25 | 1 | -16 | 25.0 | 26.4 | 32.5 | 34.1 | 36.9 | 39.3 | 36.6 | 7 | 1015 | 14 | 2030 | 28 | 4060 | 11.81 | 300 | 0.91 | |
| 31.5 | 1 1/4 | -20 | 31.4 | 33.0 | 39.3 | 41.7 | 44.4 | 47.6 | 44.8 | 4.3 | 620 | 8.7 | 1260 | 18 | 2540 | 16.54 | 420 | 1.30 | |
| 38 | 1 1/2 | -24 | 37.7 | 39.3 | 45.6 | 48.0 | 50.8 | 54.0 | 52.0 | 3.5 | 510 | 7 | 1015 | 14 | 2030 | 19.69 | 500 | 1.70 | |
| 51 | 2 | -32 | 50.4 | 52.0 | 58.7 | 61.9 | 65.1 | 68.3 | 65.9 | 2.6 | 380 | 5.2 | 750 | 11 | 1520 | 24.80 | 630 | 2.00 | |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, a reinforcement consisting on a highly tensile steel wire braid, and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

This section covers hoses for use with petroleum base hydraulic fluids within a temperature range of -40°C to +100°C

SAE 100 R2

Wrapped high pressure steel wire rubber cover



| SIZE | | | | | | | | | | | | | | | | | | | |
|------|-------|------|------|------|------|------|------|------|------|------|------|-----|-------|-----|-------|---------|-----|------|--|
| | | | I.D | | W.D | | O.D | | | W.P | | P.P | | B.P | | min B.R | | W.T | |
| mm | inch | dash | min | max | min | max | min | max | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m | |
| 5 | 3/16 | -3 | 4.6 | 5.4 | 10.6 | 11.7 | 15.1 | 16.7 | 14.1 | 35 | 5075 | 70 | 10150 | 140 | 20300 | 3.54 | 90 | 0.32 | |
| 6.3 | 1/4 | -4 | 6.2 | 7.0 | 12.1 | 13.3 | 16.7 | 18.3 | 15.7 | 35 | 5075 | 70 | 10150 | 140 | 20300 | 3.94 | 100 | 0.36 | |
| 8 | 5/16 | -5 | 7.7 | 8.5 | 13.7 | 14.9 | 18.3 | 19.8 | 17.3 | 29.7 | 4310 | 60 | 8630 | 119 | 17255 | 4.53 | 115 | 0.45 | |
| 10 | 3/8 | -6 | 9.3 | 10.1 | 16.1 | 17.3 | 20.6 | 22.2 | 19.7 | 28 | 4060 | 56 | 8120 | 112 | 16240 | 4.92 | 125 | 0.54 | |
| 12.5 | 1/2 | -8 | 12.3 | 13.5 | 19.0 | 20.6 | 23.8 | 25.4 | 23.1 | 24.5 | 3550 | 49 | 7110 | 98 | 14210 | 7.09 | 180 | 0.68 | |
| 16 | 5/8 | -10 | 15.5 | 16.7 | 22.2 | 23.8 | 27.0 | 28.6 | 26.3 | 19.2 | 2780 | 39 | 5580 | 77 | 11165 | 8.07 | 205 | 0.80 | |
| 19 | 3/4 | -12 | 18.6 | 19.8 | 26.2 | 27.8 | 31.0 | 32.5 | 30.2 | 15.7 | 2280 | 32 | 4570 | 63 | 9135 | 9.45 | 240 | 0.94 | |
| 25 | 1 | -16 | 25.0 | 26.4 | 34.1 | 35.7 | 38.5 | 40.9 | 38.9 | 14 | 2030 | 28 | 4060 | 56 | 8120 | 11.81 | 300 | 1.35 | |
| 31.5 | 1 1/4 | -20 | 31.4 | 33.0 | 43.2 | 45.6 | 49.2 | 52.4 | 49.6 | 11.3 | 1640 | 23 | 3290 | 46 | 6600 | 16.54 | 420 | 2.15 | |
| 38 | 1 1/2 | -24 | 37.7 | 39.3 | 49.6 | 52.0 | 55.6 | 58.7 | 56.0 | 8.7 | 1260 | 18 | 2540 | 35 | 5075 | 19.69 | 500 | 2.65 | |
| 51 | 2 | -32 | 50.4 | 52.0 | 62.3 | 64.7 | 68.3 | 71.4 | 68.6 | 7.8 | 1130 | 16 | 2280 | 32 | 4570 | 24.80 | 630 | 3.42 | |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, a reinforcement consisting on two highly tensile steel wire layers, and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

This section covers hoses for use with petroleum base hydraulic fluids within a temperature range of -40°C to +100°C



SAE 100 R3

Double textile fiber braid rubber cover



| SIZE | | | | | | | | | | | | | | | W.T |
|------|-------|------|------|------|------|------|------|------|------|------|------|------|---------|-----|------|
| | | | I.D | | O.D | | W.P | | P.P | | B.P | | min B.R | | |
| mm | inch | dash | min | max | min | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m |
| 5 | 3/16 | -3 | 4.5 | 5.4 | 11.9 | 13.5 | 10.5 | 1520 | 21 | 3050 | 42 | 6090 | 2.95 | 75 | 0.16 |
| 6.3 | 1/4 | -4 | 6.1 | 7.0 | 13.5 | 15.1 | 8.7 | 1260 | 17.5 | 2540 | 35 | 5075 | 2.95 | 75 | 0.18 |
| 8 | 5/16 | -5 | 7.6 | 8.5 | 16.7 | 18.3 | 8.4 | 1220 | 16.8 | 2440 | 33.5 | 4860 | 3.94 | 100 | 0.27 |
| 10 | 3/8 | -6 | 9.2 | 10.1 | 18.3 | 19.8 | 7.8 | 1130 | 15.7 | 2280 | 31.5 | 4570 | 3.94 | 100 | 0.31 |
| 12.5 | 1/2 | -8 | 12.4 | 13.5 | 23.0 | 24.6 | 7.0 | 1015 | 14 | 2030 | 28 | 4060 | 4.92 | 125 | 0.45 |
| 16 | 5/8 | -10 | 15.6 | 16.7 | 26.2 | 27.8 | 6.1 | 885 | 12.2 | 1770 | 24.5 | 3550 | 5.51 | 140 | 0.53 |
| 19 | 3/4 | -12 | 18.7 | 19.8 | 31.0 | 32.5 | 5.2 | 750 | 10.5 | 1520 | 21 | 3045 | 5.91 | 150 | 0.72 |
| 25 | 1 | -16 | 25.1 | 26.2 | 36.9 | 39.3 | 3.9 | 570 | 7.8 | 1130 | 15.7 | 2280 | 8.07 | 205 | 0.90 |
| 31.5 | 1 1/4 | -20 | 31.4 | 32.9 | 42.9 | 46.0 | 2.6 | 380 | 5.2 | 750 | 10.5 | 1520 | 9.84 | 250 | 1.07 |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, a reinforcement consisting on two highly tensile textile fiber braids, and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

This section covers hoses for use with petroleum base hydraulic fluids within a temperature range of -40°C to +100°C

SAE 100 R4

Wire inserted. Suction hose



| SIZE | | | | | | | | | | | | | | | W.T |
|------|-------|------|-------|-------|-------|------|-----|------|-----|------|------|-------|---------|------|-----|
| | | | I.D | | O.D | | W.P | | P.P | | B.P | | min B.R | | |
| mm | inch | dash | min | max | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m | |
| 19 | 3/4 | -12 | 18.2 | 19.8 | 34.9 | 2.1 | 305 | 4.2 | 610 | 8.4 | 1210 | 4.92 | 125 | 0.92 | |
| 25 | 1 | -16 | 24.6 | 26.2 | 41.3 | 1.7 | 250 | 3.5 | 510 | 7 | 1015 | 5.91 | 150 | 1.10 | |
| 31.5 | 1 1/4 | -20 | 30.6 | 33.0 | 50.8 | 1.4 | 200 | 2.8 | 410 | 5.6 | 810 | 7.87 | 200 | 1.30 | |
| 38 | 1 1/2 | -24 | 36.9 | 39.3 | 57.2 | 1.05 | 150 | 2.1 | 305 | 4.2 | 610 | 10.04 | 255 | 1.80 | |
| 51 | 2 | -32 | 49.2 | 52.4 | 69.9 | 0.7 | 100 | 1.4 | 200 | 2.8 | 410 | 11.81 | 300 | 2.23 | |
| 63 | 2 1/2 | -40 | 61.9 | 65.1 | 82.6 | 0.4 | 60 | 0.85 | 120 | 1.7 | 250 | 13.98 | 355 | 3.23 | |
| 76 | 3 | -48 | 74.6 | 77.8 | 95.3 | 0.4 | 60 | 0.8 | 120 | 1.6 | 230 | 18.11 | 460 | 4.25 | |
| 89 | 3 1/2 | -56 | 87.3 | 90.5 | 107.9 | 0.3 | 40 | 0.6 | 90 | 1.25 | 180 | 20.87 | 530 | 5.05 | |
| 102 | 4 | -64 | 100.0 | 103.2 | 120.7 | 0.25 | 40 | 0.5 | 70 | 1 | 145 | 24.02 | 610 | 5.60 | |

CONSTRUCTION:


This hose consists of an inner tube of oil resistant synthetic rubber, a reinforcement consisting on a ply or plies of woven or braided textile fibers with a suitable spiral of body steel wire, and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

This section covers hoses for use with petroleum base hydraulic fluids within a temperature range of -40°C to +100°C

SAE 100 R5

Single wire braid and double textile fibre braid



| SIZE | | | | | | | | | | | | | | | |
|------|---------|------|------|------|------|------|------|------|------|------|-------|---------|-----|------|--|
| | | I.D | | O.D | | W.P | | P.P | | B.P | | min B.R | | W.T | |
| mm | inch | min | max | min | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m | |
| 5 | 3/16 | 4.8 | 5.5 | 12.7 | 13.7 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 2.95 | 75 | 0.24 | |
| 6.3 | 1/4 | 6.4 | 7.2 | 14.3 | 15.3 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 3.35 | 85 | 0.28 | |
| 8 | 5/16 | 7.9 | 8.7 | 16.7 | 17.6 | 15.7 | 2270 | 31.5 | 4570 | 63 | 9135 | 3.94 | 100 | 0.35 | |
| 11 | 13/32 | 10.3 | 11.1 | 18.9 | 20.0 | 14 | 2030 | 28 | 4060 | 56 | 8120 | 4.53 | 115 | 0.38 | |
| 12.5 | 1/2 | 12.7 | 13.7 | 22.8 | 24.0 | 12.2 | 1770 | 24.5 | 3550 | 49 | 7105 | 5.51 | 140 | 0.51 | |
| 16 | 5/8 | 15.9 | 17.0 | 26.8 | 28.0 | 10.5 | 1520 | 21 | 3045 | 42 | 6090 | 6.50 | 165 | 0.68 | |
| 22 | 7/8 | 22.2 | 23.3 | 30.6 | 32.2 | 5.6 | 810 | 11.2 | 1620 | 22.4 | 3250 | 7.28 | 185 | 0.70 | |
| 29 | 1 1/8 | 28.6 | 29.8 | 37.3 | 38.9 | 4.3 | 620 | 8.7 | 1260 | 17.5 | 2540 | 9.06 | 230 | 0.80 | |
| 35 | 1 3/8 | 34.9 | 36.1 | 43.7 | 45.2 | 3.5 | 510 | 7 | 1015 | 14 | 2030 | 10.43 | 265 | 0.93 | |
| 46 | 1 13/16 | 46.0 | 47.2 | 55.2 | 57.6 | 2.4 | 350 | 4.9 | 700 | 9.8 | 1420 | 13.19 | 335 | 1.32 | |
| 60 | 2 3/8 | 60.3 | 61.9 | 71.8 | 74.2 | 2.4 | 350 | 4.9 | 700 | 9.8 | 1420 | 24.02 | 610 | 2.96 | |
| 76 | 3 | 76.2 | 77.8 | 89.3 | 91.7 | 1.4 | 200 | 2.8 | 410 | 5.6 | 810 | 33.07 | 840 | 4.10 | |

CONSTRUCTION:


This hose consists of an inner tube of oil resistant synthetic rubber, a single wire braid reinforcement and a fiber braided cover.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +100°C.

SAE 100 R6

Single textile fiber braid rubber cover



| SIZE | | | | | | | | | | | | | | | |
|------|------|------|------|------|------|------|-----|-----|-----|------|------|---------|------|-----|------|
| | | I.D | | O.D | | W.P | | P.P | | B.P | | min B.R | | W.T | |
| mm | inch | dash | min | max | min | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m |
| 5 | 3/16 | -3 | 4.5 | 5.4 | 10.3 | 11.9 | 3.5 | 510 | 7 | 1015 | 14 | 2030 | 1.97 | 50 | 1.10 |
| 6.3 | 1/4 | -4 | 6.1 | 7.0 | 11.9 | 13.5 | 2.8 | 410 | 5.6 | 810 | 11.2 | 1620 | 2.56 | 65 | 0.13 |
| 8 | 5/16 | -5 | 7.6 | 8.5 | 13.5 | 15.1 | 2.8 | 410 | 5.6 | 810 | 11.2 | 1620 | 2.95 | 75 | 0.15 |
| 10 | 3/8 | -6 | 9.2 | 10.1 | 15.1 | 16.7 | 2.8 | 410 | 5.6 | 810 | 11.2 | 1620 | 2.95 | 75 | 0.18 |
| 12.5 | 1/2 | -8 | 12.4 | 13.5 | 19.0 | 20.6 | 2.8 | 410 | 5.6 | 810 | 11.2 | 1620 | 3.94 | 100 | 0.26 |
| 16 | 5/8 | -10 | 15.6 | 16.7 | 22.2 | 23.8 | 2.4 | 350 | 4.9 | 710 | 9.8 | 1420 | 4.92 | 125 | 0.31 |
| 19 | 3/4 | -12 | 18.7 | 19.8 | 25.4 | 27.8 | 2.1 | 310 | 4.2 | 610 | 8.4 | 1220 | 5.91 | 150 | 0.40 |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, one braid of suitable fiber, and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +100°C.

SAE 100 R7

Thermoplastic synthetic fiber reinforced



| SIZE | | | | | | | | | min B.R | | W.T | |
|------|------|------|------|------|------|------|------|------|---------|------|-------|-------|
| | | | I.D | O.D | W.P | P.P | B.P | inch | mm | kg/m | | |
| mm | inch | dash | min | max | max | Mpa | psi | Mpa | psi | Mpa | psi | kg/m |
| 5 | 3/16 | -3 | 4.6 | 5.4 | 11.4 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 3.54 |
| 6.3 | 1/4 | -4 | 6.2 | 7.0 | 13.7 | 19.2 | 2780 | 38.5 | 5580 | 77 | 11165 | 3.94 |
| 8 | 5/16 | -5 | 7.7 | 8.5 | 15.6 | 17.5 | 2535 | 35 | 5075 | 70 | 10150 | 4.53 |
| 10 | 3/8 | -6 | 9.3 | 10.3 | 18.4 | 15.7 | 2275 | 31.5 | 4565 | 63 | 9135 | 4.92 |
| 12.5 | 1/2 | -8 | 12.3 | 13.5 | 22.5 | 14 | 2030 | 28 | 4060 | 56 | 8120 | 7.09 |
| 16 | 5/8 | -10 | 15.5 | 16.7 | 25.8 | 10.5 | 1520 | 21 | 3045 | 42 | 6090 | 8.07 |
| 19 | 3/4 | -12 | 18.6 | 19.8 | 28.6 | 8.7 | 1260 | 17.5 | 2535 | 35 | 5075 | 9.45 |
| 25 | 1 | -16 | 25.0 | 26.4 | 36.7 | 7 | 1015 | 14 | 2030 | 28 | 4060 | 11.81 |
| | | | | | | | | | | | | 300 |
| | | | | | | | | | | | | 0.403 |

CONSTRUCTION:

This hose consists of a thermoplastic inner tube resistant to hydraulic fluids with suitable synthetic fiber reinforcement, and a hydraulic fluid and weather resistant thermoplastic cover.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +93°C.

SAE 100 R8

High pressure thermoplastic synthetic fiber reinforced



| SIZE | | | | | | | | | min B.R | | W.T | |
|------|------|------|------|------|------|------|------|------|---------|------|-------|-------|
| | | | I.D | O.D | W.P | P.P | B.P | inch | mm | kg/m | | |
| mm | inch | dash | min | max | max | Mpa | psi | Mpa | psi | Mpa | psi | kg/m |
| 5 | 3/16 | -3 | 4.6 | 5.4 | 14.6 | 35 | 5075 | 70 | 10150 | 140 | 20300 | 3.54 |
| 6.3 | 1/4 | -4 | 6.2 | 7.0 | 16.8 | 35 | 5075 | 70 | 10150 | 140 | 20300 | 3.94 |
| 10 | 3/8 | -6 | 9.3 | 10.3 | 20.3 | 28 | 4060 | 56 | 8120 | 112 | 16240 | 4.92 |
| 12.5 | 1/2 | -8 | 12.3 | 13.5 | 24.6 | 24.5 | 3550 | 49 | 7105 | 98 | 14210 | 7.09 |
| 16 | 5/8 | -10 | 15.5 | 16.7 | 29.8 | 19.2 | 2780 | 38.5 | 5580 | 77 | 11165 | 8.07 |
| 19 | 3/4 | -12 | 18.6 | 19.8 | 33.0 | 15.7 | 2275 | 31.5 | 4565 | 63 | 9135 | 9.45 |
| 25 | 1 | -16 | 25.0 | 26.4 | 38.6 | 14 | 2030 | 28 | 4060 | 56 | 8120 | 11.81 |
| | | | | | | | | | | | | 300 |
| | | | | | | | | | | | | 0.505 |

CONSTRUCTION:

This hose consists of a thermoplastic inner tube resistant to hydraulic fluids with suitable synthetic fiber reinforcement, and a hydraulic fluid and weather resistant thermoplastic cover.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +93°C.

SAE 100 R9

High pressure. Four wire spiral reinforced rubber cover



| SIZE | | | | | | | | | | | | | | | | | W.T | | |
|------|-------|-----|------|------|------|------|------|------|------|------|------|------|------|------|----------|-------|-------|-----|------|
| | | | I.D. | | W.D. | | O.D. | | W.P. | | P.P. | | B.P. | | min B.R. | | | | |
| | | | mm | inch | dash | min | max | min | max | max | Mpa | psi | Mpa | psi | Mpa | psi | kg/m | | |
| 10 | 3/8 | -6 | 9.3 | 10.1 | | 16.9 | 18.0 | 20.6 | 22.2 | 21.1 | 31.5 | 4570 | 63 | 9135 | 126 | 18270 | 4.92 | 125 | 0.70 |
| 12.5 | 1/2 | -8 | 12.3 | 13.5 | | 19.4 | 21.0 | 23.8 | 25.4 | 24.3 | 28 | 4060 | 56 | 8120 | 112 | 16240 | 7.09 | 180 | 0.83 |
| 19 | 3/4 | -12 | 18.6 | 19.8 | | 26.6 | 28.2 | 30.6 | 32.2 | 31.9 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 9.45 | 240 | 1.30 |
| 25 | 1 | -16 | 25.0 | 26.4 | | 34.5 | 36.1 | 38.5 | 40.9 | 40.5 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 11.81 | 300 | 1.70 |
| 31.5 | 1 1/4 | -20 | 31.4 | 33.0 | | 43.3 | 45.6 | 49.2 | 52.4 | 50.7 | 17.5 | 2540 | 35 | 5075 | 70 | 10150 | 16.54 | 420 | 3.08 |
| 38 | 1 1/2 | -24 | 37.7 | 39.3 | | 49.6 | 52.0 | 55.6 | 58.7 | | 14 | 2030 | 28 | 4060 | 56 | 8120 | 19.69 | 500 | 4.30 |
| 51 | 2 | -32 | 50.4 | 52.0 | | 63.9 | 66.2 | 69.9 | 73.0 | | 14 | 2030 | 28 | 4060 | 56 | 8120 | 25.98 | 660 | 5.63 |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, four spiral plies of steel wire wrapped in alternating directions, and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +100°C.

SAE 100 R12

Heavy duty. Four wire spiral reinforced rubber cover



| SIZE | | | | | | | | | | | | | | | | | W.T |
|------|-------|------|------|------|------|------|------|------|------|------|------|------|------|-------|----------|-----|------|
| | | | I.D. | | W.D. | | O.D. | | W.P. | | P.P. | | B.P. | | min B.R. | | |
| mm | inch | dash | min | max | min | max | min | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m |
| 10 | 3/8 | -6 | 9.3 | 10.1 | 16.6 | 17.8 | 19.5 | 21.0 | 28 | 4060 | 56 | 8120 | 112 | 16240 | 4.92 | 125 | 0.70 |
| 12.5 | 1/2 | -8 | 12.3 | 13.5 | 19.9 | 21.5 | 23.0 | 24.6 | 28 | 4060 | 56 | 8120 | 112 | 16240 | 7.09 | 180 | 0.83 |
| 16 | 5/8 | -10 | 15.5 | 16.7 | 23.8 | 25.4 | 26.6 | 28.2 | 28 | 4060 | 56 | 8120 | 112 | 16240 | 7.87 | 200 | 1.12 |
| 19 | 3/4 | -12 | 18.6 | 19.8 | 26.9 | 28.4 | 29.9 | 31.5 | 28 | 4060 | 56 | 8120 | 112 | 16240 | 9.45 | 240 | 1.43 |
| 25 | 1 | -16 | 25.0 | 26.4 | 34.1 | 35.7 | 36.8 | 39.2 | 28 | 4060 | 56 | 8120 | 112 | 16240 | 11.81 | 300 | 2.00 |
| 31.5 | 1 1/4 | -20 | 31.4 | 33.0 | 42.7 | 45.1 | 45.4 | 48.6 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 16.54 | 420 | 2.80 |
| 38 | 1 1/2 | -24 | 37.7 | 39.3 | 49.2 | 51.6 | 51.9 | 55.0 | 17.5 | 2540 | 35 | 5075 | 70 | 10150 | 19.69 | 500 | 3.40 |
| 51 | 2 | -32 | 50.8 | 52.0 | 62.5 | 64.8 | 65.1 | 68.3 | 17.5 | 2540 | 35 | 5075 | 70 | 10150 | 25.20 | 640 | 4.25 |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, four spiral plies of steel wire wrapped in alternating directions, and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +121°C.

SAE 100 R13

Heavy duty. Multiple wire spiral reinforced rubber cover



| SIZE | | | | | | | | | | | | | | | | | |
|------|-------|------|------|------|------|------|------|------|---------|------|-----|-------|-----|-------|-------|-----|------|
| | | | I.D | W.D | O.D | W.P | P.P | B.P | min B.R | W.T | | | | | | | |
| mm | inch | dash | min | max | min | max | min | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m |
| 19 | 3/4 | -12 | 18.6 | 19.8 | 28.2 | 29.8 | 31.0 | 33.2 | 35 | 5075 | 70 | 10150 | 140 | 20300 | 9.45 | 240 | 2.10 |
| 25 | 1 | -16 | 25.0 | 26.4 | 34.9 | 36.4 | 37.6 | 39.8 | 35 | 5075 | 70 | 10150 | 140 | 20300 | 11.81 | 300 | 2.88 |
| 31.5 | 1 1/4 | -20 | 31.4 | 33.0 | 45.6 | 48.0 | 48.3 | 51.3 | 35 | 5075 | 70 | 10150 | 140 | 20300 | 16.54 | 420 | 4.20 |
| 38 | 1 1/2 | -24 | 37.7 | 39.3 | 53.1 | 55.5 | 55.8 | 58.8 | 35 | 5075 | 70 | 10150 | 140 | 20300 | 19.69 | 500 | 5.00 |
| 51 | 2 | -32 | 50.4 | 52.0 | 66.9 | 69.3 | 69.5 | 72.7 | 35 | 5075 | 70 | 10150 | 140 | 20300 | 25.20 | 640 | 7.00 |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, multiple spiral plies of heavy steel wire wrapped in alternating directions, and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +121°C.

SAE 100 R14

Ptfe inner wire braid reinforced



| SIZE | | | | | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|---------|------|------|------|------|-----|------|----|
| | | | I.D | O.D | W.P | P.P | B.P | min B.R | | | | | | | |
| mm | dash | min | max | min | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | inch | mm |
| 6.3 | -4 | 6 | 6.9 | 8.9 | 10.1 | 10.5 | 1523 | 31 | 4495 | 62 | 8990 | 2.95 | 75 | | |
| 8 | -5 | 7.5 | 8.4 | 10.4 | 11.6 | 10.5 | 1523 | 27.6 | 4002 | 55.2 | 8004 | 3.94 | 100 | | |
| 10 | -6 | 9.1 | 10.0 | 12.2 | 13.4 | 10.5 | 1523 | 24.1 | 3495 | 48.3 | 7004 | 4.92 | 125 | | |
| 11 | -7 | 9.9 | 10.9 | 12.9 | 14.3 | 7 | 1015 | 20.7 | 3002 | 41.4 | 6003 | 5.31 | 135 | | |
| 12.5 | -8 | 12.3 | 13.3 | 15.3 | 16.8 | 5.6 | 812 | 20.7 | 3002 | 41.4 | 6003 | 6.50 | 165 | | |
| 16 | -10 | 15.3 | 16.5 | 18.6 | 20.1 | 5.6 | 812 | 17.2 | 2494 | 34.5 | 5003 | 7.87 | 200 | | |
| 19 | -12 | 18.4 | 19.6 | 21.3 | 23.3 | 5.6 | 812 | 16.8 | 2436 | 27.6 | 4002 | 9.06 | 230 | | |
| 22 | -14 | 21.4 | 23.0 | 24.6 | 26.9 | 5.6 | 812 | 12.1 | 1755 | 24.1 | 3495 | 9.06 | 230 | | |
| 25 | -16 | 24.6 | 26.2 | 27.8 | 29.8 | 5.6 | 812 | 12.1 | 1755 | 24.1 | 3495 | 11.8 | 300 | | |
| 29 | -18 | 27.8 | 29.4 | 31.9 | 33.5 | 4.2 | 609 | 8.6 | 1247 | 17.2 | 2494 | 16.1 | 410 | | |

CONSTRUCTION:

Tube: Temperature chemical resistant PTFE material.

Cover: Braided with stainless steel

APPLICATIONS:

Temperature range: -60°C up to +204°C.



SAE 100 R15

Heavy duty. Four wire spiral reinforced rubber cover



SAE 100 R15

| SIZE | | | | | | | | | | | | | | | |
|------|-------|------|------|------|------|------|-----|------|---------|-------|-----|-------|-------|-----|------|
| | | | I.D | W.D | O.D | W.P | P.P | B.P | min B.R | W.T | | | | | |
| mm | inch | dash | min | max | max | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m |
| 10 | 3/8 | -6 | 9.3 | 10.1 | 20.3 | 23.3 | 42 | 6090 | 84 | 12180 | 168 | 24360 | 5.91 | 150 | 0.80 |
| 12.7 | 1/2 | -8 | 12.3 | 13.5 | 24.0 | 26.8 | 42 | 6090 | 84 | 12180 | 168 | 24360 | 7.87 | 200 | 0.95 |
| 19 | 3/4 | -12 | 18.6 | 19.8 | 32.9 | 36.1 | 42 | 6090 | 84 | 12180 | 168 | 24360 | 10.40 | 265 | 1.85 |
| 25 | 1 | -16 | 25.0 | 26.4 | 38.9 | 42.9 | 42 | 6090 | 84 | 12180 | 168 | 24360 | 13.00 | 330 | 2.90 |
| 31.5 | 1 1/4 | -20 | 31.4 | 33.0 | 48.4 | 51.5 | 42 | 6090 | 84 | 12180 | 168 | 24360 | 17.52 | 445 | 4.20 |
| 38 | 1 1/2 | -24 | 37.7 | 39.3 | 56.3 | 59.6 | 42 | 6090 | 84 | 12180 | 168 | 24360 | 20.87 | 530 | 5.60 |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, multiple spiral plies of heavy steel wire wrapped in alternating directions, and an oil and weather resistant synthetic rubber cover.

A ply or braid of suitable material may be used over the inner tube and/or over the wire reinforcement to anchor the synthetic rubber to the wire.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +121°C.

SAE 100 R16

High pressure. Two wire reinforced rubber cover



SAE 100 R16

| SIZE | | | | | | | | | | | | | | | | | |
|------|-------|------|------|------|------|------|-----|-----|-----|---------|------|-------|------|-------|------|-----|------|
| | | | I.D | W.D | O.D | M.D | W.P | P.P | B.P | min B.R | W.T | | | | | | |
| mm | inch | dash | min | max | max | max | min | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m |
| 6.3 | 1/4 | -4 | 6.2 | 7.0 | 12.3 | 14.5 | 0.8 | 1.5 | 35 | 5075 | 70 | 10150 | 140 | 20300 | 1.97 | 50 | 0.30 |
| 8 | 5/16 | -5 | 7.7 | 8.5 | 13.3 | 15.7 | 0.8 | 1.5 | 30 | 4305 | 59.5 | 8625 | 119 | 17255 | 2.17 | 55 | 0.34 |
| 10 | 3/8 | -6 | 9.3 | 10.1 | 15.9 | 18.8 | 0.8 | 1.5 | 28 | 4060 | 56 | 8120 | 112 | 16240 | 2.56 | 65 | 0.42 |
| 12.5 | 1/2 | -8 | 12.3 | 13.5 | 19.0 | 22.0 | 0.8 | 1.5 | 25 | 3550 | 49 | 7105 | 98 | 14210 | 3.54 | 90 | 0.54 |
| 16 | 5/8 | -10 | 15.5 | 16.7 | 22.6 | 25.4 | 0.8 | 1.5 | 19 | 2780 | 38.5 | 5580 | 77 | 11165 | 3.94 | 100 | 0.68 |
| 19 | 3/4 | -12 | 18.6 | 19.8 | 26.3 | 29.0 | 0.8 | 1.5 | 16 | 2275 | 31.5 | 4565 | 63 | 9135 | 4.72 | 120 | 0.80 |
| 25 | 1 | -16 | 25.0 | 26.4 | 34.0 | 36.6 | 0.8 | 1.5 | 14 | 2030 | 28 | 4060 | 56 | 8120 | 5.91 | 150 | 1.15 |
| 31.5 | 1 1/4 | -20 | 31.4 | 33.0 | 41.9 | 44.3 | 1.0 | 2.0 | 11 | 1635 | 22.7 | 3290 | 45.5 | 6595 | 8.27 | 210 | 1.83 |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, steel wire reinforcement according to hose design (one or two braids), and an oil and weather resistant synthetic rubber cover. A ply or braid of suitable material may be used over the inner tube and/or over the wire reinforcement to anchor the synthetic rubber to the wire.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +121°C.



SAE 100 R17

One or Two wire reinforced rubber cover. Low BR



| SIZE | | | | | | | | | | | | | | | |
|------|-------|------|------|------|------|------|-----|------|-----|------|-----|---------|------|-----|-------|
| | | | I.D | W.D | O.D | W.P | | P.P | | B.P | | min B.R | | W.T | |
| mm | inch | dash | min | max | max | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m |
| 6.3 | 1/4" | -4 | 6.2 | 7.0 | 11.0 | 13.2 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 1.97 | 50 | 0.169 |
| 8 | 5/16" | -5 | 7.7 | 8.5 | 13.0 | 15.0 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 2.17 | 55 | 0.210 |
| 10 | 3/8" | -6 | 9.3 | 10.1 | 15.0 | 17.0 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 2.56 | 65 | 0.254 |
| 12.5 | 1/2" | -8 | 12.3 | 13.5 | 18.8 | 21.1 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 3.54 | 90 | 0.466 |
| 16 | 5/8" | -10 | 15.5 | 16.7 | 23.6 | 25.9 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 3.94 | 100 | 0.586 |
| 19 | 3/4" | -12 | 18.6 | 19.8 | 27.7 | 30.3 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 4.72 | 120 | 0.749 |
| 25 | 1" | -16 | 25.0 | 26.4 | 35.6 | 38.6 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 5.91 | 150 | 1.457 |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, steel wire reinforcement according suitable material may be used over the inner tube and/or over the wire reinforcement to anchor the synthetic rubber to the wire.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +121°C.

DIN EN853 1SN/1ST

One wire braid reinforced. SN thinner cover than ST



| SIZE | | | | | | | O.D | | W.P | | P.P | | B.P | | min B.R | | W.T | |
|------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|---------|-------|-----|------|
| | | | I.D | W.D | 1 ST | 1 SN | | | | | | | | | | | | |
| mm | inch | dash | min | max | min | max | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m | | |
| 5 | 3/16 | -3 | 4.6 | 5.4 | 9.0 | 10.0 | 11.9 | 13.5 | 12.5 | 25 | 3625 | 50 | 7250 | 100 | 14500 | 3.54 | 90 | 0.20 |
| 6.3 | 1/4 | -4 | 6.2 | 7.0 | 10.6 | 11.6 | 15.1 | 16.7 | 14.1 | 22.5 | 3260 | 45 | 6525 | 90 | 13050 | 3.94 | 100 | 0.25 |
| 8 | 5/16 | -5 | 7.7 | 8.5 | 12.1 | 13.3 | 16.7 | 18.3 | 15.7 | 21.5 | 3120 | 43 | 6235 | 85 | 12325 | 4.53 | 115 | 0.31 |
| 10 | 3/8 | -6 | 9.3 | 10.1 | 14.5 | 15.7 | 19.0 | 20.6 | 18.1 | 18 | 2610 | 36 | 5220 | 72 | 10440 | 5.12 | 130 | 0.36 |
| 12.5 | 1/2 | -8 | 12.3 | 13.5 | 17.5 | 19.1 | 22.2 | 23.8 | 21.4 | 16 | 2320 | 32 | 4640 | 64 | 9280 | 7.09 | 180 | 0.45 |
| 16 | 5/8" | -10 | 15.5 | 16.7 | 20.6 | 22.2 | 25.4 | 27.0 | 24.5 | 13 | 1885 | 26 | 3770 | 52 | 7540 | 7.87 | 200 | 0.52 |
| 19 | 3/4" | -12 | 18.6 | 19.8 | 24.6 | 26.2 | 29.4 | 31.0 | 28.5 | 10.5 | 1520 | 21 | 3045 | 42 | 6090 | 9.45 | 240 | 0.65 |
| 25 | 1" | -16 | 25.0 | 26.4 | 32.5 | 34.1 | 37.1 | 39.1 | 36.6 | 8.8 | 1280 | 17.5 | 2540 | 35 | 5075 | 11.81 | 300 | 0.91 |
| 31.5 | 1 1/4 | -20 | 31.4 | 33.0 | 39.3 | 41.7 | 44.4 | 47.6 | 44.8 | 6.3 | 910 | 15 | 2175 | 25 | 3625 | 16.54 | 420 | 1.30 |
| 38 | 1 1/2 | -24 | 37.7 | 39.3 | 45.6 | 48.0 | 50.8 | 54.0 | 52.1 | 5 | 725 | 10 | 1450 | 20 | 2900 | 19.69 | 500 | 1.70 |
| 51 | 2 | -32 | 50.4 | 52.0 | 58.7 | 61.7 | 65.1 | 68.3 | 65.5 | 4 | 580 | 8 | 1160 | 16 | 2320 | 24.80 | 630 | 2.00 |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, one braid of steel wire reinforcement, and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +100°C.

DIN EN853 2SN/2ST

Two wire braid reinforced. SN thinner cover than ST



| SIZE | | | | | | | | | | | | | | | | | | | |
|------|-------|------|------|------|------|------|------|------|------|------|------|------|-------|-----|-------|---------|-----|------|--|
| | | | I.D | | W.D | | O.D | | | W.P | | P.P | | B.P | | min B.R | | W.T | |
| | | | | | | | 2 ST | | 2 SN | | | | | | | | | | |
| mm | inch | dash | min | max | min | max | min | max | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m | |
| 5 | 3/16 | -3 | 4.6 | 5.4 | 10.6 | 11.6 | 15.1 | 16.7 | 14.1 | 41.5 | 6020 | 83 | 12035 | 165 | 23295 | 3.54 | 90 | 0.32 | |
| 6.3 | 1/4 | -4 | 6.2 | 7.0 | 12.1 | 13.3 | 16.7 | 18.3 | 15.7 | 40 | 5800 | 80 | 11600 | 160 | 23200 | 3.94 | 100 | 0.36 | |
| 8 | 5/16 | -5 | 7.7 | 8.5 | 13.7 | 14.9 | 18.3 | 19.9 | 17.3 | 35 | 5075 | 70 | 10150 | 140 | 20300 | 4.53 | 115 | 0.45 | |
| 10 | 3/8 | -6 | 9.3 | 10.1 | 16.1 | 17.3 | 20.6 | 22.2 | 19.7 | 33 | 4785 | 66 | 9570 | 132 | 19140 | 5.12 | 130 | 0.54 | |
| 12.5 | 1/2 | -8 | 12.3 | 13.5 | 19.0 | 20.6 | 23.8 | 25.4 | 23.0 | 27.5 | 3990 | 55 | 7975 | 110 | 15950 | 7.09 | 180 | 0.68 | |
| 16 | 5/8 | -10 | 15.5 | 16.7 | 22.2 | 23.8 | 27.0 | 28.6 | 26.2 | 25 | 3625 | 50 | 7250 | 100 | 14500 | 7.87 | 200 | 0.80 | |
| 19 | 3/4 | -12 | 18.6 | 19.8 | 26.2 | 27.8 | 31.0 | 32.6 | 30.1 | 21.5 | 3120 | 43 | 6235 | 85 | 12350 | 9.45 | 240 | 0.94 | |
| 25 | 1 | -16 | 25.0 | 26.4 | 34.1 | 35.7 | 38.5 | 40.9 | 38.9 | 16.5 | 2390 | 32.5 | 4710 | 65 | 9425 | 11.81 | 300 | 1.35 | |
| 31.5 | 1 1/4 | -20 | 31.4 | 33.0 | 43.3 | 45.7 | 49.2 | 52.4 | 49.5 | 12.5 | 1810 | 25 | 3625 | 50 | 7250 | 16.54 | 420 | 2.15 | |
| 38 | 1 1/2 | -24 | 37.7 | 39.3 | 49.6 | 52.0 | 55.6 | 58.8 | 55.9 | 9 | 1305 | 18 | 2310 | 36 | 5220 | 19.69 | 500 | 2.65 | |
| 51 | 2 | -32 | 50.4 | 52.0 | 62.3 | 64.7 | 68.2 | 71.4 | 68.6 | 8 | 1160 | 16 | 2320 | 32 | 4640 | 24.80 | 630 | 3.42 | |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, two braids of steel wire reinforcement, and an weather resistant synthetic rubber cover.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +100°C.

DIN EN854 1TE

One textile fiber braid



| SIZE | | | | | | | | | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|-----|------|-----|-----|------|-------|-----|-------|---------|------|-----|--|
| | | | I.D | | W.D | | O.D | | | W.P | | P.P | | B.P | | min B.R | | W.T | |
| | | | | | | | 2 ST | | 2 SN | | | | | | | | | | |
| mm | inch | dash | min | max | min | max | bar | psi | bar | psi | bar | psi | bar | psi | inch | mm | kg/m | | |
| 5 | 3/16 | -3 | 4.4 | 5.2 | 10.0 | 11.6 | 25 | 363 | 50 | 725 | 100 | 1450 | 1.378 | 35 | 0.093 | | | | |
| 6 | 1/4 | -4 | 5.9 | 6.9 | 11.6 | 13.2 | 25 | 363 | 50 | 725 | 100 | 1450 | 1.772 | 45 | 0.114 | | | | |
| 8 | 5/16 | -5 | 7.4 | 8.4 | 13.1 | 14.7 | 20 | 290 | 40 | 580 | 80 | 1160 | 2.559 | 65 | 0.133 | | | | |
| 10 | 3/8 | -6 | 9.0 | 10.0 | 14.7 | 16.3 | 20 | 290 | 40 | 580 | 80 | 1160 | 2.953 | 75 | 0.15 | | | | |
| 12 | 1/2 | -8 | 12.1 | 13.3 | 17.7 | 19.7 | 16 | 232 | 32 | 464 | 64 | 928 | 3.543 | 90 | 0.19 | | | | |
| 16 | 5/8 | -10 | 15.3 | 16.5 | 21.9 | 23.9 | 16 | 232 | 32 | 464 | 64 | 928 | 4.528 | 115 | 0.277 | | | | |

CONSTRUCTION:

This hose consists of an oil water resistant synthetic rubber lining, one of suitable textile yarn and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

Hydraulic fluids in accordance with ISO6743-4 with the exception of HRD R, HFD S and HFD T at temperatures range of -40°C ~ +100C.

DIN EN854 2TE

Two textile fiber braid. Abrasion and weather resistant cover



| SIZE | | | | | | | | | | | | | | | | |
|------|------|------|------|------|------|------|-----|------|-----|------|-----|------|---------|-----|-------|--|
| | | | I.D | | O.D | | W.P | | P.P | | B.P | | min B.R | | W.T | |
| mm | inch | dash | min | max | min | max | bar | psi | bar | psi | bar | psi | inch | mm | kg/m | |
| 5 | 3/16 | -3 | 4.4 | 5.2 | 11 | 12.6 | 80 | 1160 | 160 | 2320 | 320 | 4640 | 1.378 | 35 | 0.117 | |
| 6 | 1/4 | -4 | 5.9 | 6.9 | 12.6 | 14.2 | 75 | 1088 | 150 | 2176 | 300 | 4352 | 1.575 | 40 | 0.139 | |
| 8 | 5/16 | -5 | 7.4 | 8.4 | 14.1 | 15.7 | 68 | 986 | 136 | 1972 | 272 | 3944 | 1.969 | 50 | 0.157 | |
| 10 | 3/8 | -6 | 9.0 | 10.0 | 15.7 | 17.3 | 63 | 914 | 126 | 1828 | 252 | 3656 | 2.362 | 60 | 0.183 | |
| 12 | 1/2 | -8 | 12.1 | 13.3 | 18.7 | 20.7 | 58 | 841 | 116 | 1682 | 232 | 3364 | 2.756 | 70 | 0.222 | |
| 16 | 5/8 | -10 | 15.3 | 16.5 | 22.9 | 24.9 | 50 | 725 | 100 | 1450 | 200 | 2900 | 3.543 | 90 | 0.316 | |
| 19 | 3/4 | -12 | 18.2 | 19.8 | 26 | 28 | 45 | 653 | 90 | 1306 | 180 | 2612 | 4.331 | 110 | 0.37 | |
| 25 | 1 | -16 | 24.6 | 26.2 | 32.9 | 35.9 | 40 | 580 | 80 | 1160 | 160 | 2320 | 5.118 | 130 | 0.547 | |

CONSTRUCTION:

This hose consists of an oil water resistant synthetic rubber lining, two of suitable textile yarn and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

Hydraulic fluids in accordance with ISO6743-4 with the exception of HRD R, HFD S and HFD T at temperatures range of -40°C ~ +100C.

DIN EN854 3TE



Two textile fiber braid. Oil and weather resistant cover

| SIZE | | | | | | | | | | | | | | | | |
|------|-------|------|------|------|------|------|-----|------|-----|------|-----|------|---------|-----|-------|--|
| | | | I.D | | O.D | | W.P | | P.P | | B.P | | min B.R | | W.T | |
| mm | inch | dash | min | max | min | max | bar | psi | bar | psi | bar | psi | inch | mm | kg/m | |
| 5 | 3/16 | -3 | 4.4 | 5.2 | 12.0 | 13.6 | 160 | 2320 | 320 | 4640 | 640 | 9280 | 1.57 | 40 | 0.129 | |
| 6 | 1/4 | -4 | 5.9 | 6.9 | 13.6 | 15.2 | 145 | 2103 | 290 | 4206 | 580 | 8412 | 1.77 | 45 | 0.153 | |
| 8 | 5/16 | -5 | 7.4 | 8.4 | 16.1 | 17.7 | 130 | 1885 | 260 | 3770 | 520 | 7540 | 2.16 | 55 | 0.210 | |
| 10 | 3/8 | -6 | 9.0 | 10.0 | 17.7 | 19.3 | 110 | 1595 | 220 | 3190 | 440 | 6380 | 2.75 | 70 | 0.241 | |
| 12 | 1/2 | -8 | 12.1 | 13.3 | 20.7 | 22.7 | 93 | 1349 | 186 | 2698 | 372 | 5396 | 3.35 | 85 | 0.299 | |
| 16 | 5/8 | -10 | 15.3 | 16.5 | 24.9 | 26.9 | 80 | 1160 | 160 | 2320 | 320 | 4640 | 4.13 | 105 | 0.405 | |
| 19 | 3/4 | -12 | 18.2 | 19.8 | 28.0 | 30.0 | 70 | 1015 | 140 | 2030 | 280 | 4060 | 5.12 | 130 | 0.470 | |
| 25 | 1 | -16 | 24.6 | 26.2 | 34.4 | 37.4 | 55 | 798 | 110 | 1596 | 220 | 3192 | 5.91 | 150 | 0.633 | |
| 31 | 1 1/4 | -20 | 30.8 | 32.8 | 40.8 | 43.8 | 45 | 653 | 90 | 1306 | 180 | 2612 | 7.48 | 190 | 0.774 | |
| 38 | 1 1/2 | -24 | 37.1 | 39.1 | 47.6 | 51.6 | 40 | 580 | 80 | 1160 | 160 | 2320 | 9.45 | 240 | 0.973 | |
| 51 | 2 | -32 | 49.8 | 51.8 | 60.3 | 64.3 | 33 | 479 | 66 | 958 | 132 | 1916 | 11.81 | 300 | 1.246 | |

CONSTRUCTION:

This hose consists of an oil water resistant synthetic rubber lining, two of suitable textile yarn and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

Hydraulic fluids in accordance with ISO6743-4 with the exception of HRD R, HFD S and HFD T at temperatures range of -40°C ~ +100C.

DIN EN856 4SP

Four wire reinforced. Oil and weather resistant cover



| SIZE | | | | | | | | | | | | | | | | | W.T |
|------|-------|------|------|------|------|------|------|------|------|------|-----|-------|-----|-------|---------|-----|------|
| | | | I.D | | W.D | | O.D | | W.P | | P.P | | B.P | | min B.R | | |
| mm | inch | dash | min | max | min | max | min | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m |
| 6.3 | 1/4 | -4 | 6.2 | 7.0 | 14.1 | 15.3 | 17.1 | 18.7 | 45 | 6525 | 90 | 13050 | 180 | 26100 | 5.91 | 150 | 0.64 |
| 10 | 3/8 | -6 | 9.3 | 10.1 | 16.9 | 18.1 | 20.6 | 22.2 | 44.5 | 6450 | 89 | 12905 | 178 | 25810 | 7.09 | 180 | 0.75 |
| 12.5 | 1/2 | -8 | 12.3 | 13.5 | 19.4 | 21.0 | 23.8 | 25.4 | 41.5 | 6020 | 83 | 12035 | 166 | 24070 | 9.06 | 230 | 0.89 |
| 16 | 5/8 | -10 | 15.5 | 16.7 | 23.0 | 24.6 | 27.4 | 29.0 | 35 | 5075 | 70 | 10150 | 140 | 20300 | 9.84 | 250 | 1.10 |
| 19 | 3/4 | -12 | 18.6 | 19.8 | 27.4 | 29.0 | 31.4 | 33.0 | 35 | 5075 | 70 | 10150 | 148 | 21460 | 11.81 | 300 | 1.50 |
| 25 | 1 | -16 | 25.0 | 26.4 | 34.5 | 36.1 | 38.5 | 40.9 | 28 | 4060 | 56 | 8120 | 112 | 16240 | 13.39 | 340 | 2.00 |
| 31.5 | 1 1/4 | -20 | 31.4 | 33.0 | 45.0 | 47.0 | 49.2 | 52.4 | 21 | 3045 | 42 | 6090 | 84 | 12180 | 18.11 | 460 | 3.00 |
| 38 | 1 1/2 | -24 | 37.7 | 39.3 | 51.4 | 53.4 | 55.6 | 58.8 | 18.5 | 2680 | 37 | 5365 | 74 | 10730 | 22.05 | 560 | 3.40 |
| 51 | 2 | -32 | 50.4 | 52.0 | 64.3 | 66.3 | 68.2 | 71.4 | 16.5 | 2390 | 33 | 4785 | 66 | 9570 | 25.98 | 660 | 4.35 |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, four spiral plies of steel wire wrapped in alternating directions, and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +100°C.

DIN EN856 4SH

Four wire reinforced. Oil and weather resistant cover



| SIZE | | | | | | | | | | | | | | | | | W.T |
|------|-------|------|------|------|------|------|------|------|------|------|-----|-------|-----|-------|---------|-----|------|
| | | | I.D | | W.D | | O.D | | W.P | | P.P | | B.P | | min B.R | | |
| mm | inch | dash | min | max | min | max | min | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m |
| 19 | 3/4 | -12 | 18.6 | 19.8 | 27.6 | 29.2 | 31.4 | 33.0 | 42 | 6090 | 84 | 12180 | 168 | 24360 | 11.02 | 280 | 1.70 |
| 25 | 1 | -16 | 25.0 | 26.4 | 34.4 | 36.0 | 37.5 | 39.9 | 38 | 5510 | 76 | 11020 | 152 | 22040 | 13.39 | 340 | 2.50 |
| 31.5 | 1 1/4 | -20 | 31.4 | 33.0 | 40.9 | 42.9 | 43.9 | 47.1 | 32.5 | 4710 | 65 | 9425 | 130 | 18850 | 18.11 | 460 | 3.00 |
| 38 | 1 1/2 | -24 | 37.7 | 39.3 | 47.8 | 49.8 | 51.9 | 55.1 | 29 | 4205 | 58 | 8410 | 116 | 16820 | 22.05 | 560 | 3.60 |
| 51 | 2 | -32 | 50.4 | 52.0 | 62.2 | 64.2 | 66.5 | 69.7 | 25 | 3625 | 50 | 7250 | 100 | 14500 | 27.56 | 700 | 5.00 |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, four spiral plies of steel wire wrapped in alternating directions, and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +100°C.

DIN EN857 1SC

One wire braid. NBR tube and cover

 DIN EN857 1SC



| SIZE | | |  |  |  |  |  |  |  |  | | | | | | |
|------|------|------|---|---|---|---|--|---|---|---|------|------|-------|------|-----|------|
| | | | I.D. | W.D. | O.D. | W.P. | P.P. | B.P. | min B.R. | W.T. | | | | | | |
| mm | inch | dash | min | max | min | max | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m |
| 6.3 | 1/4 | -4 | 6.1 | 6.9 | 9.6 | 10.8 | 13.5 | 22.5 | 3260 | 45 | 6525 | 90 | 13050 | 2.95 | 75 | 0.20 |
| 8 | 5/16 | -5 | 7.7 | 8.5 | 10.9 | 12.1 | 14.5 | 21.5 | 3120 | 43 | 6235 | 86 | 12470 | 3.35 | 85 | 0.15 |
| 10 | 3/8 | -6 | 9.3 | 10.1 | 12.7 | 14.5 | 16.9 | 18 | 2610 | 36 | 5220 | 72 | 10440 | 3.54 | 90 | 0.19 |
| 12.5 | 1/2 | -8 | 12.3 | 13.5 | 15.9 | 18.1 | 20.4 | 16 | 2320 | 32 | 4640 | 64 | 9280 | 5.12 | 130 | 0.23 |
| 16 | 5/8 | -10 | 15.5 | 16.7 | 19.8 | 21.0 | 23.0 | 13 | 1885 | 26 | 3770 | 52 | 7540 | 5.91 | 150 | 0.29 |
| 19 | 3/4 | -12 | 18.6 | 19.8 | 23.2 | 24.4 | 26.7 | 10.5 | 1520 | 21 | 3045 | 42 | 6090 | 7.09 | 180 | 0.34 |
| 25 | 1 | -16 | 25.0 | 26.4 | 30.7 | 31.9 | 34.9 | 8.8 | 1280 | 17.6 | 2550 | 35.2 | 5100 | 9.06 | 230 | 0.49 |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, a single steel wire braid reinforcement, and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +100°C.

DIN EN857 2SC

Two wire braid. NBR tube and cover

 DIN EN857 2SC



| SIZE | | |  |  |  |  |  |  |  |  | | | | | | |
|------|------|------|---|---|---|---|--|---|---|---|-------|-----|-------|------|-----|------|
| | | | I.D. | W.D. | O.D. | W.P. | P.P. | B.P. | min B.R. | W.T. | | | | | | |
| mm | inch | dash | min | max | min | max | max | Mpa | psi | Mpa | psi | Mpa | psi | inch | mm | kg/m |
| 6.3 | 1/4 | -4 | 6.1 | 6.9 | 10.6 | 11.7 | 14.2 | 40 | 5800 | 80 | 11600 | 160 | 23200 | 2.95 | 75 | 0.30 |
| 8 | 5/16 | -5 | 7.7 | 8.5 | 12.1 | 13.3 | 16.0 | 35 | 5075 | 70 | 10150 | 140 | 20300 | 3.35 | 85 | 0.34 |
| 10 | 3/8 | -6 | 9.3 | 10.1 | 14.4 | 15.6 | 18.3 | 33 | 4785 | 66 | 9570 | 132 | 19140 | 3.54 | 90 | 0.42 |
| 12.5 | 1/2 | -8 | 12.3 | 13.5 | 17.5 | 19.1 | 21.5 | 27.5 | 3990 | 55 | 7975 | 110 | 15950 | 5.12 | 130 | 0.54 |
| 16 | 5/8 | -10 | 15.5 | 16.7 | 20.5 | 22.3 | 24.7 | 25 | 3625 | 50 | 7250 | 100 | 14500 | 6.69 | 170 | 0.68 |
| 19 | 3/4 | -12 | 18.6 | 19.8 | 24.6 | 26.4 | 28.6 | 21.5 | 3120 | 43 | 6235 | 86 | 12470 | 7.87 | 200 | 0.80 |
| 25 | 1 | -16 | 25.0 | 26.4 | 32.5 | 34.3 | 36.6 | 16.5 | 2390 | 33 | 4785 | 66 | 9570 | 9.84 | 250 | 1.15 |

CONSTRUCTION:

This hose consists of an inner tube of oil resistant synthetic rubber, two braids of steel wire reinforcement, and an oil and weather resistant synthetic rubber cover.

APPLICATIONS:

This section covers hose for use with petroleum base hydraulic fluids within a temperature range of -40°C ~ +100°C.



Bearings | Hydraulics | Power Transmission

www.translinkpt.com